

**This Page Is Inserted by IFW Operations
and is not a part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- **BLACK BORDERS**
- **TEXT CUT OFF AT TOP, BOTTOM OR SIDES**
- **FADED TEXT**
- **ILLEGIBLE TEXT**
- **SKEWED/SLANTED IMAGES**
- **COLORED PHOTOS**
- **BLACK OR VERY BLACK AND WHITE DARK PHOTOS**
- **GRAY SCALE DOCUMENTS**

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

This Page Blank (uspto)



Europäisches Patentamt

European Patent Office

Office européen des brevets



Publication number:

0 503 645 A2

EUROPEAN PATENT APPLICATION

Application number: 92104312.1

Int. Cl. 5: H04N 1/40

Date of filing: 12.03.92

Priority: 12.03.91 JP 73843/91

Date of publication of application:
16.09.92 Bulletin 92/38

Designated Contracting States:
DE FR GB IT NL

Applicant: MITA INDUSTRIAL CO. LTD.
2-28, Tamatsukuri 1-chome Chuo-ku
Osaka-shi Osaka-fu 540(JP)

Inventor: Shimatani, Akira
481-1 Wada
Sakai-shi, Osaka-fu, 593(JP)

Representative: Böhnenberger, Johannes, Dr.
et al


Meissner, Beite & Partner
Widenmayerstrasse 48 Postfach 86 06 24
W-8000 München 86(DE)

Matrix address generator and multivalue gradation processor having the same.

The present invention provides a matrix address generator for generating horizontal and vertical addresses in various patterns in the case where a memory table matrix provided in gradation data storage means is specified by the horizontal and vertical addresses. The matrix address generator (2) comprises a dot counting portion (21), a line counting portion (22), an address exchanging portion (23), a

boundary exchanging portion (24), matrix boundary counting portions (25) and (26), and adding portions (27) and (28). Addresses counted by the dot counting portion (21) are exchanged by the address exchanging portion (23) if necessary. The addresses and adding addresses counted by the matrix boundary counting portion (25) are added together so that addresses having various patterns can be obtained.

FIG. 31

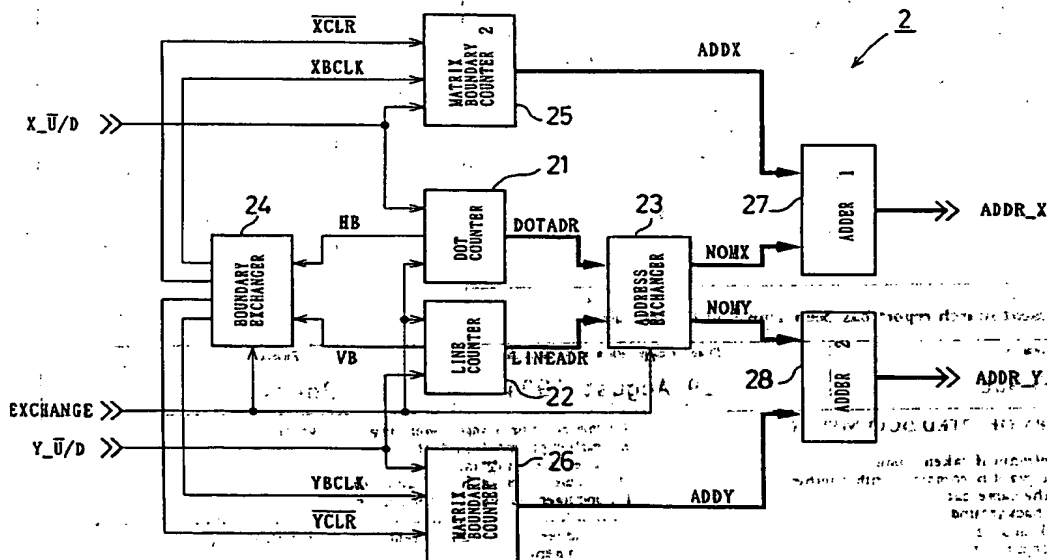

Technical Field

The present invention relates to a multivalue gradation processor for images provided in an image forming apparatus, and more particularly to the improvement of an address generator which generates an address for specifying the memory table of a dither matrix memory in the case where a multivalue gradation processing for images is carried out by using the dither matrix memory.

Background of Art

There has been used a method for reproducing half-tone images in the image forming apparatus such as a dither method, a density pattern method or an area gradation method using them together (hereinafter referred to as "a multivalue dither method"). Various digital image forming apparatuses, such as a digital copying apparatus, a digital facsimile apparatus, a digital printer and the like have variously been devised in order to reproduce good half-tone image by utilizing the above-mentioned methods.

Related Art

By way of example, the prior art related to the present invention has been disclosed in Japanese Laid Open Gazette No. 288449/1989, wherein a dither pattern obtained by rotating a general spiral dither pattern at an angle of 90 degrees is used for color recording so that the area of color shift is not reduced at the time of color image reproduction and color reproducibility can be enhanced.

Japanese Laid Open Gazette No. 114159/1989 has disclosed an improved method for generating binary half-tone images by using a dither matrix. Referring to this method, a first dither matrix having a normal pattern and a second dither matrix having a pattern which is formed by shifting the normal pattern by two rows are stored in a dither matrix memory so that threshold is read out of the first dither matrix and the second dither matrix in a main scanning direction (laterally). Consequently, a half-tone image formed based on the threshold has black pixels dispersed without deflecting to a predetermined row, so that an image of high quality can be obtained.

Japanese Laid Open Gazette No. 160258/1989 has also disclosed a method for generating binary half-tone images by using a dither matrix. According to the prior art, thresholds are read out of the dither matrix regularly and repeatedly so that the half-tone image has black pixels deflected and is not of high quality. Referring to a disclosed method, in the case where the threshold is read out of the dither matrix in a main scanning direction

(laterally), the dither matrix is shifted longitudinally and sequentially. In addition, a counter is used for specifying the address of the dither matrix in order to read out the threshold. The counting start value of the counter is varied for each line. More specifically, (1) the initial value of the counter is preloaded by software, (2) a clock for count-up is provided when scanning operation is transferred from the previous line to the next line such that the initial value of the counter corresponds to that of the next line, and (3) a limit is set to the range of reading so as to forcibly correspond the initial value of the counter to a predetermined value when the scanning operation is transferred to the next line.

Referring to the prior art described above, it is common that the order and method of reading thresholds out of a dither matrix memory are varied to generate half-tone image by a dither method so that good half-tone image can be obtained.

According to a technique disclosed in Japanese Laid Open Gazette No. 288449/1989, however, various kinds of dither patterns cannot be generated. Consequently, the order of reading out the thresholds cannot be changed according to the color of an image or the like.

According to the methods disclosed in Japanese Laid Open Gazette Nos. 114159/1989 and 160258/1989, the thresholds are read out of the dither matrix which is longitudinally shifted. Consequently, the order of reading out the thresholds can be changed. According to the former method, however, a mass dither matrix memory or a plurality of dither matrix memories should be prepared to change the order of reading out the thresholds according to the quality of an image or the like. The reason is that plurality of the dither matrices, each of which has the quantity of shifting varied by the longitudinal shifting of first and second dither matrices, should be stored.

According to the method disclosed in Japanese Laid Open Gazette No. 160258/1989, it is sufficient that only one dither matrix having a normal pattern is stored in the dither matrix memory. Referring to an addressing method using a counter which has been disclosed, addressing can be performed only for shifting the dither matrix longitudinally and sequentially. Consequently, the addressing is carried out without variety.

It is an object of the present invention to provide a matrix address generator for generating various memory addresses for specifying the memory table such that the memory table of a dither matrix memory can be specified in optional order and with an optional pattern, in which thresholds are variously read out of the dither matrix memory so that the reproducibility of half-tone images can be enhanced.

It is another object of the present invention to

provide a multivalue gradation processor for images in which thresholds can be read out of a dither matrix memory in optional orders and with an optional pattern so as to obtain good half-tone images.

The matrix address generator according to the present invention comprises a dot counter for repeatedly counting X pulses to be provided within a first counted value range which is predetermined, a line counter for repeatedly counting Y pulses to be provided within a second counted value range which is predetermined, and outputting counted values as Y addresses; an X shift address counter for repeatedly counting within a predetermined counted value range shift addresses which shift X addresses; and an adder for adding together values counted by the dot counter and values counted by the X shift address counter in synchronous with the X pulses, and outputting addition values as the X addresses.

From an aspect of the present invention, the X addresses can be shifted. In this case, the X pulses are repeatedly counted by the dot counter. In addition, the shift addresses for shifting the X addresses are repeatedly counted by the X shift address counter. The values counted by the dot counter and the X shift address counter are added together in synchronous with the X pulses. Consequently, the shifted X addresses are sequentially outputted.

From another aspect of the present invention, the Y addresses can be shifted. The Y address to be shifted is a value obtained by adding together the values counted by the line counter and the Y shift address counter in synchronous with the X pulses.

From yet another aspect of the present invention, it is possible to selectively shift the X or Y address.

From a further aspect of the present invention, the matrix address can be rotated.

Moreover, it is possible to generate a matrix address in which address shifting is combined with matrix rotation.

Furthermore, it is possible to select a memory table from multivalue gradation data memory by using any one of the above-mentioned matrix address generators.

According to the present invention having a comparatively simple circuit structure, there can be reproduced good half-tone representation by a dither method. In addition, the address generating order and pattern are variously changed so that a desired screen angle can freely be given to a dither matrix pattern, and the dither matrix pattern can freely be rotated. Consequently, even if input image data is changed into color image data, black-and-white image data, photo data, and the

like, it is possible to produce a dither matrix pattern according to the type of the input image data. Thus, good half-tone images can be reproduced.

These and other objects, features and advantages of the present invention will become more apparent upon a reading of the following detailed description and drawings.

Figure 1 is a block diagram showing the schematic structure of a multivalue gradation processor for images according to an embodiment of the present invention;

Figure 2 is a diagram for explaining the contents of a memory table provided in gradation data storage means;

Figure 3 is a diagram for explaining the summary of a memory map of the gradation data storage means;

Figure 4 is a diagram for explaining the relationship between input addresses and the contents of output data stored in the memory table shown in Figure 3;

Figure 5 is a diagram showing a memory table matrix provided in the gradation data storage means according to an embodiment of the present invention;

Figure 6 is a diagram showing the memory map of the memory table matrix shown in Figure 5;

Figure 7 is a diagram for explaining one of basic functions according to an embodiment of the present invention, in which a matrix is longitudinally shifted;

Figure 8 is a diagram for explaining one of basic functions according to an embodiment of the present invention, in which a basic matrix is laterally shifted;

Figure 9 is a diagram for explaining one of basic functions according to an embodiment of the present invention, in which the rotation and type of the basic matrix are shown;

Figure 10 is a diagram for explaining one of basic functions according to an embodiment of the present invention, in which the matrix is simultaneously rotated and shifted;

Figure 11 is a diagram for explaining one of basic functions according to an embodiment of the present invention, in which the matrix is simultaneously rotated and shifted;

Figure 12 is a diagram showing a normal state in which a 4 x 4 basic matrix is neither shifted nor rotated;

Figure 13 is a diagram showing a state in which the 4 x 4 basic matrix is rotated by 90 degrees;

Figure 14 is a diagram showing a state in which the 4 x 4 basic matrix is rotated by 180 degrees;

Figure 15 is a diagram showing a state in which the 4 x 4 basic matrix is rotated by 270 degrees;

Figure 16 is a diagram showing a state in which the 4 x 4 basic matrix is shifted by 1 pixel in a

reverse main scanning direction between the matrices in a subscanning direction; Figure 17 is a diagram showing a state in which the 4 x 4 basic matrix is shifted by 2 pixels in the reverse main scanning direction between the matrices in the subscanning direction; Figure 18 is a diagram showing a state in which the 4 x 4 basic matrix is shifted by 3 pixels in the reverse main scanning direction between the matrices in the subscanning direction; Figure 19 is a diagram showing a state in which the 4 x 4 basic matrix is shifted by 1 pixel (1 line) in a reverse subscanning direction between the matrices in a main scanning direction; Figure 20 is a diagram showing a state in which the 4 x 4 basic matrix is shifted by 2 pixels (2 lines) in the reverse subscanning direction between the matrices in the main scanning direction; Figure 21 is a diagram showing a state in which the 4 x 4 basic matrix is shifted by 3 pixels (3 lines) in the reverse subscanning direction between the matrices in the main scanning direction; Figure 22 is a diagram showing a state in which the processing start position of the 4 x 4 basic matrix is delayed by 1 pixel in the main scanning direction; Figure 23 is a diagram showing a state in which the processing start position of the 4 x 4 basic matrix is delayed by 2 pixels in the main scanning direction; Figure 24 is a diagram showing a state in which the processing start position of the 4 x 4 basic matrix is delayed by 3 pixels in the main scanning direction; Figure 25 is a diagram showing a state in which the processing start position of the 4 x 4 basic matrix is delayed by 1 pixel (1 line) in the subscanning direction; Figure 26 is a diagram showing a state in which the processing start position of the 4 x 4 basic matrix is delayed by 2 pixels (2 lines) in the subscanning direction; Figure 27 is a diagram showing a state in which the processing start position of the 4 x 4 basic matrix is delayed by 3 pixels (3 lines) in the subscanning direction; Figure 28 is a diagram showing a state in which the 4 x 4 basic matrix is shifted by 1 pixel in the main scanning direction between the matrices in the subscanning direction and is rotated by 90 degrees; Figure 29 is a diagram showing a state in which the 4 x 4 basic matrix is shifted by 1 pixel in the main scanning direction between the matrices in the subscanning direction and is rotated by 180 degrees;

Figure 30 is a diagram showing a state in which the 4 x 4 basic matrix is shifted by 1 pixel in the main scanning direction between the matrices in the subscanning direction and is rotated by 270 degrees; Figure 31 is a block diagram showing the circuit structure of a matrix address generator according to an embodiment of the present invention; Figure 32 is a timing chart showing the basic signal waveform of the matrix address generator; Figure 33 is a block diagram showing the specific circuit structure of an address counting portion and a line counting portion; Figure 34 is a block diagram showing the specific circuit structure of an address exchanging portion; Figure 35 is a block diagram showing the specific circuit structure of a boundary exchanging portion; Figure 36 is a block diagram showing the specific circuit structure of a matrix boundary counting portion; Figure 37 is a block diagram showing the specific circuit structure of an adding portion; Figure 38 is a diagram for explaining the case in which the processing start position of each color component is varied at the time of a color image processing; and Figure 39 is a schematic diagram showing another example in which the matrix address generator according to the embodiment of the present invention is used.

Fig. 40 is a block diagram showing the schematic structure of a multivalue gradation processor for images according to an embodiment of the present invention. The multivalue gradation processor is provided with storage means 1 in which multivalue gradation data are stored. As will be described later in detail, the gradation data storage means 1 includes a plurality of memory tables to which addresses are allocated in a matrix having m rows and n columns (hereinafter referred to as "m x n", for example, "3 x 2" when m = 3 and n = 2). The multivalue gradation data is stored for each memory table. The memory tables to which the addresses are allocated in a matrix can be selected by specifying a horizontal address and a vertical address. Based on the multivalue gradation data stored in the memory table thus selected, a gradation processing for an input data is carried out.

The present embodiment is characterized by the contents of a matrix address generator 2 which gives the horizontal address and the vertical address to the gradation data storage means 1. There will be described in detail a method for generating the horizontal address and the vertical address by means of the matrix address generator 2.

Data outputted from the gradation data storage means 1 is sent to a multivalue means 3. The multivalue means 3 serves to create PWM data for controlling laser beams. More specifically, the multivalue means 3 creates a pulse width data for determining laser lighting time period per one pixel. The pulse data thus created is provided as a video signal to a laser control circuit (not shown) and the like.

Figs. 2, 3 and 4 are diagrams for explaining how to select the memory table by using the horizontal address, the vertical address and the contents of the gradation data stored in the gradation data storage means 1 shown in Fig. 1. For simplicity, Figs. 2 to 4 show the case where addresses are assigned such that the memory tables MT00, MT01, MT10 and MT11 are arranged in a 2x2 matrix.

With reference to Fig. 2, there will be described the case where 1 pixel is made ternary by a 2 x 2 dither matrix. Two thresholds are necessary for making 1 pixel ternary. More specifically, input data (for example, X) to be provided is compared with two thresholds (for example, "1" and "5") so as to be made ternary. By way of example, when the input data X is equal to 0, there can be obtained ternary output data "00" expressed by using two bits because of $0 < 0 < 5$. When the input data X is equal to 3, there can be obtained output data "10" (or, "01") because of $1 < 3 < 5$. When the input data X is equal to 7, there can be obtained output data "11" because of $1 < 5 < 7$.

Accordingly, first and second dither matrices A and B are necessary for making 1 pixel ternary by the 2 x 2 dither matrix.

Fig. 2 shows the relationship between the memory tables MT00, MT01, MT10 and MT11 and the first and second dither matrices A and B. In the memory table MT00, gradation data based on a threshold "1" of the first dither matrix A and a threshold "5" of the second dither matrix B are stored. In the memory table MT01, gradation data based on a threshold "2" of the first dither matrix A and a threshold "6" of the second dither matrix B are stored. In the memory table MT10, gradation data based on thresholds "3" and "7" are stored. In the memory table MT11, gradation data based on thresholds "4" and "8" are stored.

If the horizontal address and the vertical address are provided, the memory tables MT00 to MT11 can be specified. More specifically, the memory tables MT00 to MT11 can be selected by the horizontal addresses of low-order 2 bits and the vertical addresses of high-order 2 bits as shown in Fig. 3.

Fig. 4 shows the relationship between input addresses and gradation data stored in the memory tables MT00 to MT11. As described with reference

to Fig. 2, in the memory tables MT00 to MT11, gradation data based on the thresholds of the first and second dither matrices A and B are stored. The gradation data are not two thresholds themselves but result data obtained by comparing input data X with the two thresholds. If the input data X is comprised of 3 bits, X takes 8 kinds of values, i.e., X = 000, 001, 010, ..., 111. For this reason, in the memory tables MT00 to MT11, data which are obtained by comparing the respective input data X of 000 to 111 with the two thresholds are stored.

As apparent from Fig. 4, the gradation data stored in the memory tables MT00 to MT11 are based on two thresholds which are different from each other. Consequently, the contents of the gradation data related to the input address, i.e., input data X are varied for each of the memory tables MT00 to MT11.

Input addresses "000" to "111" shown in Fig. 4 are different from addresses shown in Fig. 3. The addresses shown in Fig. 3 (horizontal and vertical addresses) serve to specify any of the memory tables MT00 to MT11. The addresses shown in Fig. 4 serve to specify any of gradation data stored in the specified memory table.

The input data can be used as input addresses to coincide with a bit number. Consequently, there can be read out gradation data corresponding to the input data.

There has been described the basic function of the multivalue gradation processor according to the present embodiment shown in Fig. 1.

A memory table provided in the gradation data storage means will be described more specifically.

Fig. 5 shows a memory table matrix in which addresses are allocated in a 4 x 4 matrix. Memory tables MT00 to MT33 forming the 4 x 4 matrix are stored in the gradation data storage means 1 (see Fig. 1). In fact, the memory tables MT00 to MT33 are mapped as shown in Fig. 6, so that the memory table can optionally be selected when a table address is determined.

Meanwhile, the table addresses are represented by decimal numbers in Fig. 5 and binary numbers in Fig. 6. In Fig. 6, low-order 2 bits are X-direction addresses (horizontal addresses) and high-order 2 bits are Y-direction addresses (vertical addresses).

The present embodiment is characterized by a method or order of generating table addresses which select memory tables. As will be described below, an optional memory table can sequentially be selected in optional order, or a specific memory table group can sequentially be selected according to specific rules.

More specifically, a limit is set to the variable

range of the table address so that the 4×4 memory table matrix shown in Fig. 5 is used as 2×2 , 2×3 , 2×4 , 3×2 , 3×3 and 3×4 matrices. In other words, a matrix size to be used can be varied.

In the case where a desired matrix size is determined to be repeatedly used as a basic matrix in a main scanning direction (X or line direction) as described above, i.e., the basic matrix is arranged in the main scanning direction, the ordinary arrangement will be made as shown in Fig. 7(A), and however such arrangement can be made as shown in Fig. 7(B) in which the next matrix in the main scanning direction can sequentially be shifted in a subscanning direction. A quantity of shifting in the reverse subscanning direction can freely be determined for each memory table, i.e., for each line. If the basic matrix has a 4×4 size, shifting can be carried out by 3 lines at most. Fig. 7(B) shows an example in which the shifting is carried out by 1 line.

In the case where the basic matrix is arranged in the main scanning direction, the processing itself of the arrangement by shifting the next matrix in the subscanning direction is the same as in Japanese Laid-Open Gazette (No. 160258/1989) which was afore-mentioned as a prior art is cited to be known.

In the case where the basic matrix is sequentially used in the subscanning direction, i.e., the basic matrix is arranged in the subscanning direction (see Fig. 8(A)), the next matrix in the subscanning direction can sequentially be shifted in the main scanning direction (see Fig. 8(B)). A quantity of shifting can freely be set for each memory table, i.e., for each pixel. If the basic matrix has a 4×4 size, shifting can be carried out by 3 pixels at most. Fig. 8(B) shows an example in which the shifting is carried out by 2 pixels.

According to the present embodiment, there can alternatively be carried out the shifting process in the subscanning direction shown in Fig. 7(B) or in the main scanning direction shown in Fig. 8(B). In other words, there cannot simultaneously be carried out the shifting process in the main scanning and subscanning directions.

As shown in Fig. 9, the basic matrix can be rotated depending on the way that the table address (see Fig. 6) is specified. More specifically, the matrix can be rotated by a desired angle for every 90 degrees; for example, 0 degree (no rotation), 90 degrees, 180 degrees and 270 degrees. The matrix thus rotated can sequentially be used.

Further, according to the present embodiment, the matrix can simultaneously be rotated and shifted. In this case, the basic matrix is shifted as shown in Fig. 10 (in which a 2×3 basic matrix is shifted by 1 pixel in the main scanning direction) and is then rotated as shown in Fig. 11 (in which the basic matrix is rotated by 90 degrees). Further-

more, the output timings of the horizontal and vertical addresses which are outputted from the matrix address generator 2 (see Fig. 1) are delayed for each pixel or for each line, so that a processing start position can be delayed by a predetermined quantity in the main scanning or subscanning direction. When the processing start position is delayed, a yellow dither processing start position, a magenta dither processing start position, and a cyanogen dither processing start position can be varied in case of color copying as will be described below. Consequently, there can be obtained a copy having good coloring and the like.

As described above, in the case where a $m \times n$ memory table matrix stored in the gradation data storage means 1 (see Fig. 1) is selected by the horizontal and vertical addresses, the basic matrix size can be set, the shifting can be carried out in the main scanning and subscanning directions, rotation can be carried out, the shifting and rotation can simultaneously be carried out, and the processing start timing can be delayed. Consequently, when the processed basic matrix is used, various and good multivalued gradation processings can be carried out for input data. In particular, a dither matrix pattern can be set according to the type and color of the input data or the like.

Figs. 12 to 30 show specific arrangement as a concrete example in which the 4×4 memory table matrix shown in Fig. 5 is used.

In Figs. 12 to 30, EXCHANGE, X, U/D, Y, U/D, X, SIZE, X, START, X, SHIFT, Y, SIZE, Y, START, and Y, SHIFT denoted above the matrix represent the set data values in a specific structural circuit to be described below with reference to Figs. 31 to 37.

Figure 12 is a diagram showing a normal state in which a 4×4 basic matrix is neither shifted nor rotated.

Figure 13 is a diagram showing a state in which the 4×4 basic matrix is rotated by 90 degrees.

Figure 14 is a diagram showing a state in which the 4×4 basic matrix is rotated by 180 degrees.

Figure 15 is a diagram showing a state in which the 4×4 basic matrix is rotated by 270 degrees.

Figure 16 is a diagram showing a state in which the 4×4 basic matrix is shifted by 1 pixel in a reverse main scanning direction between matrices in a subscanning direction.

Figure 17 is a diagram showing a state in which the 4×4 basic matrix is shifted by 2 pixels in the reverse main scanning direction between the matrices in the subscanning direction.

Figure 18 is a diagram showing a state in which the 4×4 basic matrix is shifted by 3 pixels

change a counting start timing so as to vary a processing start position in the main scanning direction. e.g. 1) SGC1, 2) SGC2, 3) SGC3, 4) SGC4, 5) SGC5, 6) SGC6, 7) SGC7, 8) SGC8, 9) SGC9, 10) SGC10, 11) SGC11, 12) SGC12, 13) SGC13, 14) SGC14, 15) SGC15, 16) SGC16, 17) SGC17, 18) SGC18, 19) SGC19, 20) SGC20, 21) SGC21, 22) SGC22, 23) SGC23, 24) SGC24, 25) SGC25, 26) SGC26, 27) SGC27, 28) SGC28, 29) SGC29, 30) SGC30, 31) SGC31, 32) SGC32, 33) SGC33, 34) SGC34, 35) SGC35, 36) SGC36, 37) SGC37, 38) SGC38, 39) SGC39, 40) SGC40, 41) SGC41, 42) SGC42, 43) SGC43, 44) SGC44, 45) SGC45, 46) SGC46, 47) SGC47, 48) SGC48, 49) SGC49, 50) SGC50, 51) SGC51, 52) SGC52, 53) SGC53, 54) SGC54, 55) SGC55, 56) SGC56, 57) SGC57, 58) SGC58, 59) SGC59, 60) SGC60, 61) SGC61, 62) SGC62, 63) SGC63, 64) SGC64, 65) SGC65, 66) SGC66, 67) SGC67, 68) SGC68, 69) SGC69, 70) SGC70, 71) SGC71, 72) SGC72, 73) SGC73, 74) SGC74, 75) SGC75, 76) SGC76, 77) SGC77, 78) SGC78, 79) SGC79, 80) SGC80, 81) SGC81, 82) SGC82, 83) SGC83, 84) SGC84, 85) SGC85, 86) SGC86, 87) SGC87, 88) SGC88, 89) SGC89, 90) SGC90, 91) SGC91, 92) SGC92, 93) SGC93, 94) SGC94, 95) SGC95, 96) SGC96, 97) SGC97, 98) SGC98, 99) SGC99, 100) SGC100, 101) SGC101, 102) SGC102, 103) SGC103, 104) SGC104, 105) SGC105, 106) SGC106, 107) SGC107, 108) SGC108, 109) SGC109, 110) SGC110, 111) SGC111, 112) SGC112, 113) SGC113, 114) SGC114, 115) SGC115, 116) SGC116, 117) SGC117, 118) SGC118, 119) SGC119, 120) SGC120, 121) SGC121, 122) SGC122, 123) SGC123, 124) SGC124, 125) SGC125, 126) SGC126, 127) SGC127, 128) SGC128, 129) SGC129, 130) SGC130, 131) SGC131, 132) SGC132, 133) SGC133, 134) SGC134, 135) SGC135, 136) SGC136, 137) SGC137, 138) SGC138, 139) SGC139, 140) SGC140, 141) SGC141, 142) SGC142, 143) SGC143, 144) SGC144, 145) SGC145, 146) SGC146, 147) SGC147, 148) SGC148, 149) SGC149, 150) SGC150, 151) SGC151, 152) SGC152, 153) SGC153, 154) SGC154, 155) SGC155, 156) SGC156, 157) SGC157, 158) SGC158, 159) SGC159, 160) SGC160, 161) SGC161, 162) SGC162, 163) SGC163, 164) SGC164, 165) SGC165, 166) SGC166, 167) SGC167, 168) SGC168, 169) SGC169, 170) SGC170, 171) SGC171, 172) SGC172, 173) SGC173, 174) SGC174, 175) SGC175, 176) SGC176, 177) SGC177, 178) SGC178, 179) SGC179, 180) SGC180, 181) SGC181, 182) SGC182, 183) SGC183, 184) SGC184, 185) SGC185, 186) SGC186, 187) SGC187, 188) SGC188, 189) SGC189, 190) SGC190, 191) SGC191, 192) SGC192, 193) SGC193, 194) SGC194, 195) SGC195, 196) SGC196, 197) SGC197, 198) SGC198, 199) SGC199, 200) SGC200, 201) SGC201, 202) SGC202, 203) SGC203, 204) SGC204, 205) SGC205, 206) SGC206, 207) SGC207, 208) SGC208, 209) SGC209, 210) SGC210, 211) SGC211, 212) SGC212, 213) SGC213, 214) SGC214, 215) SGC215, 216) SGC216, 217) SGC217, 218) SGC218, 219) SGC219, 220) SGC220, 221) SGC221, 222) SGC222, 223) SGC223, 224) SGC224, 225) SGC225, 226) SGC226, 227) SGC227, 228) SGC228, 229) SGC229, 230) SGC230, 231) SGC231, 232) SGC232, 233) SGC233, 234) SGC234, 235) SGC235, 236) SGC236, 237) SGC237, 238) SGC238, 239) SGC239, 240) SGC240, 241) SGC241, 242) SGC242, 243) SGC243, 244) SGC244, 245) SGC245, 246) SGC246, 247) SGC247, 248) SGC248, 249) SGC249, 250) SGC250, 251) SGC251, 252) SGC252, 253) SGC253, 254) SGC254, 255) SGC255, 256) SGC256, 257) SGC257, 258) SGC258, 259) SGC259, 260) SGC260, 261) SGC261, 262) SGC262, 263) SGC263, 264) SGC264, 265) SGC265, 266) SGC266, 267) SGC267, 268) SGC268, 269) SGC269, 270) SGC270, 271) SGC271, 272) SGC272, 273) SGC273, 274) SGC274, 275) SGC275, 276) SGC276, 277) SGC277, 278) SGC278, 279) SGC279, 280) SGC280, 281) SGC281, 282) SGC282, 283) SGC283, 284) SGC284, 285) SGC285, 286) SGC286, 287) SGC287, 288) SGC288, 289) SGC289, 290) SGC290, 291) SGC291, 292) SGC292, 293) SGC293, 294) SGC294, 295) SGC295, 296) SGC296, 297) SGC297, 298) SGC298, 299) SGC299, 300) SGC300, 301) SGC301, 302) SGC302, 303) SGC303, 304) SGC304, 305) SGC305, 306) SGC306, 307) SGC307, 308) SGC308, 309) SGC309, 310) SGC310, 311) SGC311, 312) SGC312, 313) SGC313, 314) SGC314, 315) SGC315, 316) SGC316, 317) SGC317, 318) SGC318, 319) SGC319, 320) SGC320, 321) SGC321, 322) SGC322, 323) SGC323, 324) SGC324, 325) SGC325, 326) SGC326, 327) SGC327, 328) SGC328, 329) SGC329, 330) SGC330, 331) SGC331, 332) SGC332, 333) SGC333, 334) SGC334, 335) SGC335, 336) SGC336, 337) SGC337, 338) SGC338, 339) SGC339, 340) SGC340, 341) SGC341, 342) SGC342, 343) SGC343, 344) SGC344, 345) SGC345, 346) SGC346, 347) SGC347, 348) SGC348, 349) SGC349, 350) SGC350, 351) SGC351, 352) SGC352, 353) SGC353, 354) SGC354, 355) SGC355, 356) SGC356, 357) SGC357, 358) SGC358, 359) SGC359, 360) SGC360, 361) SGC361, 362) SGC362, 363) SGC363, 364) SGC364, 365) SGC365, 366) SGC366, 367) SGC367, 368) SGC368, 369) SGC369, 370) SGC370, 371) SGC371, 372) SGC372, 373) SGC373, 374) SGC374, 375) SGC375, 376) SGC376, 377) SGC377, 378) SGC378, 379) SGC379, 380) SGC380, 381) SGC381, 382) SGC382, 383) SGC383, 384) SGC384, 385) SGC385, 386) SGC386, 387) SGC387, 388) SGC388, 389) SGC389, 390) SGC39

Similarly, the line counting portion 22 serves to change a counting start position so as to vary a processing start position in the subscanning direction.

The matrix boundary counting portions 25 and 26 serve to count matrix boundary signals HB and VB (which are sent to the counting portions 25 and 26 through the boundary exchanging portion 24 and represented by XBCLK and YBCLK), respectively. By way of example, when the set basic matrix size is 3' x 3' and a setting value of the shifting in the subscanning direction (longitudinally) or the main scanning direction (laterally) is 2, the matrix boundary counting portions 25 and 26 perform count-up and count-down as follows:

In the case of count-up: $0 \rightarrow 2 (= 0 + 2) \rightarrow 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 54, 55, 56, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 67, 68, 69, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100, 101, 102, 103, 104, 105, 106, 107, 108, 109, 110, 111, 112, 113, 114, 115, 116, 117, 118, 119, 120, 121, 122, 123, 124, 125, 126, 127, 128, 129, 130, 131, 132, 133, 134, 135, 136, 137, 138, 139, 140, 141, 142, 143, 144, 145, 146, 147, 148, 149, 150, 151, 152, 153, 154, 155, 156, 157, 158, 159, 160, 161, 162, 163, 164, 165, 166, 167, 168, 169, 170, 171, 172, 173, 174, 175, 176, 177, 178, 179, 180, 181, 182, 183, 184, 185, 186, 187, 188, 189, 190, 191, 192, 193, 194, 195, 196, 197, 198, 199, 200, 201, 202, 203, 204, 205, 206, 207, 208, 209, 210, 211, 212, 213, 214, 215, 216, 217, 218, 219, 220, 221, 222, 223, 224, 225, 226, 227, 228, 229, 230, 231, 232, 233, 234, 235, 236, 237, 238, 239, 240, 241, 242, 243, 244, 245, 246, 247, 248, 249, 250, 251, 252, 253, 254, 255, 256, 257, 258, 259, 260, 261, 262, 263, 264, 265, 266, 267, 268, 269, 270, 271, 272, 273, 274, 275, 276, 277, 278, 279, 280, 281, 282, 283, 284, 285, 286, 287, 288, 289, 290, 291, 292, 293, 294, 295, 296, 297, 298, 299, 300, 301, 302, 303, 304, 305, 306, 307, 308, 309, 310, 311, 312, 313, 314, 315, 316, 317, 318, 319, 320, 321, 322, 323, 324, 325, 326, 327, 328, 329, 330, 331, 332, 333, 334, 335, 336, 337, 338, 339, 340, 341, 342, 343, 344, 345, 346, 347, 348, 349, 350, 351, 352, 353, 354, 355, 356, 357, 358, 359, 360, 361, 362, 363, 364, 365, 366, 367, 368, 369, 370, 371, 372, 373, 374, 375, 376, 377, 378, 379, 380, 381, 382, 383, 384, 385, 386, 387, 388, 389, 390, 391, 392, 393, 394, 395, 396, 397, 398, 399, 400, 401, 402, 403, 404, 405, 406, 407, 408, 409, 410, 411, 412, 413, 414, 415, 416, 417, 418, 419, 420, 421, 422, 423, 424, 425, 426, 427, 428, 429, 430, 431, 432, 433, 434, 435, 436, 437, 438, 439, 440, 441, 442, 443, 444, 445, 446, 447, 448, 449, 450, 451, 452, 453, 454, 455, 456, 457, 458, 459, 460, 461, 462, 463, 464, 465, 466, 467, 468, 469, 470, 471, 472, 473, 474, 475, 476, 477, 478, 479, 480, 481, 482, 483, 484, 485, 486, 487, 488, 489, 490, 491, 492, 493, 494, 495, 496, 497, 498, 499, 500, 501, 502, 503, 504, 505, 506, 507, 508, 509, 510, 511, 512, 513, 514, 515, 516, 517, 518, 519, 520, 521, 522, 523, 524, 525, 526, 527, 528, 529, 530, 531, 532, 533, 534, 535, 536, 537, 538, 539, 540, 541, 542, 543, 544, 545, 546, 547, 548, 549, 550, 551, 552, 553, 554, 555, 556, 557, 558, 559, 560, 561, 562, 563, 564, 565, 566, 567, 568, 569, 570, 571, 572, 573, 574, 575, 576, 577, 578, 579, 580, 581, 582, 583, 584, 585, 586, 587, 588, 589, 590, 591, 592, 593, 594, 595, 596, 597, 598, 599, 600, 601, 602, 603, 604, 605, 606, 607, 608, 609, 610, 611, 612, 613, 614, 615, 616, 617, 618, 619, 620, 621, 622, 623, 624, 625, 626, 627, 628, 629, 630, 631, 632, 633, 634, 635, 636, 637, 638, 639, 640, 641, 642, 643, 644, 645, 646, 647, 648, 649, 650, 651, 652, 653, 654, 655, 656, 657, 658, 659, 660, 661, 662, 663, 664, 665, 666, 667, 668, 669, 670, 671, 672, 673, 674, 675, 676, 677, 678, 679, 680, 681, 682, 683, 684, 685, 686, 687, 688, 689, 690, 691, 692, 693, 694, 695, 696, 697, 698, 699, 700, 701, 702, 703, 704, 705, 706, 707, 708, 709, 710, 711, 712, 713, 714, 715, 716, 717, 718, 719, 720, 721, 722, 723, 724, 725, 726, 727, 728, 729, 730, 731, 732, 733, 734, 735, 736, 737, 738, 739, 740, 741, 742, 743, 744, 745, 746, 747, 748, 749, 750, 751, 752, 753, 754, 755, 756, 757, 758, 759, 760, 761, 762, 763, 764, 765, 766, 767, 768, 769, 770, 771, 772, 773, 774, 775, 776, 777, 778, 779, 780, 781, 782, 783, 784, 785, 786, 787, 788, 789, 790, 791, 792, 793, 794, 795, 796, 797, 798, 799, 800, 801, 802, 803, 804, 805, 806, 807, 808, 809, 810, 811, 812, 813, 814, 815, 816, 817, 818, 819, 820, 821, 822, 823, 824, 825, 826, 827, 828, 829, 830, 831, 832, 833, 834, 835, 836$

[illegible]

As seen from the above-mentioned example, a quantity of shift to be set should not exceed a matrix size. More specifically, when a matrix size is $m \times n$, the maximum values of shift set longitudinally and laterally are $(m-1)$ and $(n-1)$, respectively.

The count-up or count-down of the matrix boundary counting portion 25 is switched by an up/down switching signal (X, U/D) in similar to the dot counting portion 21. The count-up or count-down of the matrix boundary counting portion 26 is switched by an up/down switching signal (Y, U/D) in similar to the line counting portion 22.

Values counted by the matrix boundary count:

Portion	Count
0-25	25
26-51	26
52-77	26
78-103	26
104-129	26
130-155	26
156-181	26
182-207	26
208-233	26
234-259	26
260-285	26
286-311	26
312-337	26
338-363	26
364-389	26
390-415	26
416-441	26
442-467	26
468-493	26
494-519	26
520-545	26
546-571	26
572-597	26
598-623	26
624-649	26
650-675	26
676-701	26
702-727	26
728-753	26
754-779	26
780-805	26
806-831	26
832-857	26
858-883	26
884-909	26
910-935	26
936-961	26
962-987	26
988-1013	26
1014-1039	26
1040-1065	26
1066-1091	26
1092-1117	26
1118-1143	26
1144-1169	26
1170-1195	26
1196-1221	26
1222-1247	26
1248-1273	26
1274-1299	26
1300-1325	26
1326-1351	26
1352-1377	26
1378-1403	26
1404-1429	26
1430-1455	26
1456-1481	26
1482-1507	26
1508-1533	26
1534-1559	26
1560-1585	26
1586-1611	26
1612-1637	26
1638-1663	26
1664-1689	26
1690-1715	26
1716-1741	26
1742-1767	26
1768-1793	26
1794-1819	26
1820-1845	26
1846-1871	26
1872-1897	26
1898-1923	26
1924-1949	26
1950-1975	26
1976-2001	26
2002-2027	26
2028-2053	26
2054-2079	26
2080-2105	26
2106-2131	26
2132-2157	26
2158-2183	26
2184-2209	26
2210-2235	26
2236-2261	26
2262-2287	26
2288-2313	26
2314-2339	26
2340-2365	26
2366-2391	26
2392-2417	26
2418-2443	26
2444-2469	26
2470-2495	26
2496-2521	26
2522-2547	26
2548-2573	26
2574-2599	26
2600-2625	26
2626-2651	26
2652-2677	26
2678-2703	26
2704-2729	26
2730-2755	26
2756-2781	26
2782-2807	26
2808-2833	26
2834-2859	26
2860-2885	26
2886-2911	26
2912-2937	26
2938-2963	26
2964-2989	26
2990-3015	26
3016-3041	26
3042-3067	26
3068-3093	26
3094-3119	26
3120-3145	26
3146-3171	26
3172-3197	26
3198-3223	26
3224-3249	26
3250-3275	26
3276-3301	26
3302-3327	26
3328-3353	26
3354-3379	26
3380-3405	26
3406-3431	26
3432-3457	26
3458-3483	26
3484-3509	26
3510-3535	26
3536-3561	26
3562-3587	26
3588-3613	26
3614-3639	26
3640-3665	26
3666-3691	26
3692-3717	26
3718-3743	26
3744-3769	26
3770-3795	26
3796-3821	26
3822-3847	26
3848-3873	26
3874-3899	26
3900-3925	26
3926-3951	26
3952-3977	26
3978-4003	26
4004-4029	26
4030-4055	26
4056-4081	26
4082-4107	26
4108-4133	26
4134-4159	26
4160-4185	26
4186-4211	26
4212-4237	26
4238-4263	26
4264-4289	26
4290-431	

The address-exchanging portion 23 and the boundary-exchanging portion 24 serve to exchange a dot address (DOTADR) for a line address (LINEADR) and to exchange an X direction boundary signal HB for a Y direction boundary signal VB based on an exchange signal (EXCHANGE), respectively.

The adding portion 27 serves to add together an address (NOMX) outputted from the address exchanging portion 23 and an adding address (ADDX) generated by the matrix boundary counting portion 25 so as to generate a horizontal address (ADDR. X) (The address NOMX is a dot address counted by the dot counting portion 21 when the address exchange is not carried out, and it is a line address outputted from the line counting portion 22 when the address exchange is carried out). Similarly, the adding portion 28 serves to add together

an address (NOMY) outputted from the address exchanging portion 23 and an adding address (ADDY) counted by the matrix boundary counting portion 26 so as to generate a vertical address (ADDR. Y). (The address NOMY is a line address counted by the line counting portion 22 when the address exchange is not carried out, and it is a dot address outputted from the dot counting portion 21 when the address exchange is carried out).

When an output address as a result obtained by the adding portions 27 and 28 exceeds (matrix size - 1), the matrix size is subtracted:

Figs. 32 (A) and (B) are timing charts between basic signals sent to the matrix address generator 2. Fig. 32 (A) shows a timing between a vertical synchronous signal (VSYNC inverted signal) and a horizontal synchronous signal (HSYNC inverted signal). Fig. 32 (B) shows a timing between the horizontal synchronous signal and a clock (CLK). The vertical synchronous signal serves to give a processing start timing vertically (in the subscanning or Y direction) and to define a period in which a processing can be carried out in the subscanning direction. While the vertical synchronous signal is at a high level, the processing can be carried out in the subscanning direction. The horizontal synchronous signal serves to give a processing start timing horizontally (in the main scanning or X direction) and to define a period in which a processing can be carried out in the main scanning direction. While the horizontal synchronous signal is at a high level, the processing can be carried out in the main scanning direction. The clock is a signal which gives a basic operating timing to each component of the matrix address generator 2 and is synchronized with a pixel. Each component of the matrix address generator 2 performs a processing for each pixel in synchronous with the clock.

There will be described in more detail each component of the matrix address generator 2 shown in Fig. 31.

Fig. 33 is a block diagram showing the specific structure of the dot counting portion 21 and the line counting portion 22. As shown in Fig. 33, the structure of the dot counting portion 21 is the same as that of the line counting portion 22. The types of signals sent to the dot counting portion 21 and line counting portion 22 are different from each other. In the case where a circuit shown in Fig. 33 is operated as the dot counting portion 21, signals which are not put in parentheses are sent thereto. In the case where the same circuit is operated as the line counting portion 22, signals which are put in parentheses are sent thereto.

In Fig. 33, thin and solid lines denote 1-bit signal lines, and data and/or signal lines having a plurality of bits respectively in similar to Fig. 31. An arrow except inside denotes the set data of each

parameter. In fact, the set data is sent from a CPU (not shown). In general, the set data is not directly sent from the CPU, but is once written to a set register and then sent therefrom. Accordingly, the set data, represented by the arrow, except inside 5, can be reset by the CPU, if necessary, so that it can be changed into an optional set data by operator manipulation or software processings. More specifically, the set data is a data value described above the matrix as shown in Figs. 12 to 30, and specifies a basic matrix size, a shifting value of a processing start position and an angle of rotation of a matrix.

As described above, the dot counting portion 21 (line counting portion 22) is a circuit portion in which the count-up or down for the addresses is carried out for each dot (for each line) mainly and the processing start position is varied. The dot counting portion 21 (line counting portion 22) includes an up/down counter 211, a selector 212, a detecting circuit 213, a shift register 214, a selector 215 and a flip-flop 216 as shown in Fig. 33. The up/down counter 211 serves to count up or down addresses. The selector 212 serves to select a set matrix size, i.e., an X size or a Y size. The detecting circuit 213 serves to detect the maximum size of a matrix or "0". The shift register 214 serves to shift a signal until the signal reaches a processing start position. The selector 215 serves to receive the set data for the processing start position. The flip-flop 216 serves to hold and output a matrix boundary signal.

There will be described the operation of the dot counting portion 21 shown in Fig. 33. The count-up or count-down of the up/down counter 211 is switched by an up/down switching signal (X, U/D). The up/down switching signal is also sent to the detecting circuit 213. The detecting circuit 213 detects "0" at the time of count-up, or the maximum size of the matrix provided from the selector 212 at the time of count-down.

At the time of count-up, the up/down counter 211 loads an output value "0" of an AND gate 217 (having a plurality of AND gates connected in parallel), and then performs count-up according to the input of a clock (CLK). When the detecting circuit 213 detects that an output value (DOTADR) of the counter 211 is equal to the set size data (X, SIZE) provided from the selector 212, the detecting circuit 213 outputs "low". The output of the detecting circuit 213 is connected to the LOAD control terminal of the up/down counter 211 through an AND gate 218. Consequently, the up/down counter 211 loads again the output value "0" of the AND gate 217 and repeatedly performs count-up.

At the time of count-down, the up/down counter 211 loads the set size data (X, SIZE) provided from the selector 212 through the AND gate 217 and

then performs count-down according to the input of the clock (CLK). When the detecting circuit 213 detects that the output value (DOTADR) of the counter 211 is "0", it outputs "low". The output of the detecting circuit 213 is connected to the LOAD control terminal of the up/down counter 211 through the AND gate 218. Consequently, the up/down counter 211 loads again the set size data (X, SIZE) provided from the selector 212 through the AND gate 217 and repeatedly performs count-down.

A value counted by the up/down counter 211 is outputted as a dot address (DOTADR). When an exchange signal (EXCHANGE) is sent to the selector 212, the size data is switched from (X, SIZE) to (Y, SIZE) and vice versa. The set data (X, SIZE) and (Y, SIZE) provided to the selector 212 are not matrix sizes but the maximum values of the addresses, i.e., (matrix size - 1).

If the selection of the selector 215 is changed by the set data (X, START), a processing is started. More specifically, the shift register 214 starts operation when a horizontal synchronous signal (HSYNC inverted signal) rises. Every time a clock (CLK) is provided, shifting is carried out. A plurality of shifting values thus processed are provided to the selector 215. The selector 215 selects any of the shift values based on the set data (X, START) and outputs the same as a processing start signal. Until the processing start signal is outputted from the selector 215, the loading of the up/down counter 211 is controlled. Until the processing start position is obtained, the up/down counter 211 keeps an initial value loaded and performs neither count-up nor count-down.

When the processing start signal is outputted from the selector 215, the output of the detecting circuit 213 then becomes "low" and the clock (CLK) is provided, the flip-flop 216 is set so that a matrix boundary in the main scanning direction is detected. Consequently, a boundary signal (HB) is outputted. However, when the output of the detecting circuit 213 becomes "high" and the clock (CLK) is provided, the flip-flop 216 is reset. Consequently, the boundary signal (HB) is not outputted.

Fig. 34 is a circuit block diagram showing the specific structure of the address exchanging portion 23. Also in Fig. 34, thin and solid lines denote 1-bit signal lines, and data and/or signal lines having a plurality of bits, respectively. The address exchanging portion 23 includes selectors 231 and 232 which are connected in parallel as shown in Fig. 34. A dot address (DOTADR) and a line address (LINEADR) are provided to the selectors 231 and 232, respectively. Then, either of the dot address (DOTADR) and line address (LINEADR) is selected. The selectors 231 and 232 select either

of addresses contrary to each other by means of an exchange signal (EXCHANGE). When the exchange signal is at a low level, an output address (NOMX) of the selector 231 is a dot address and an output address (NOMY) of the selector 232 is a line address. When the exchange signal is at a high level, the selection of the selectors 231 and 232 is reversed. Consequently, the output address (NOMX) of the selector 231 is a line address and the output address (NOMY) of the selector 232 is a dot address.

There will be summarized the contents of set address signals in the case where the rotation of a matrix is not specified. In the case where the matrix is not rotated, up/down switching signals (X, U/D) and (Y, U/D) are set to "low" such that the dot counting portion 21 and the line counting portion 22 (see Fig. 31) perform count-up, and an exchange signal (EXCHANGE) is set to "low" such that the address-exchanging portion 23 does not perform address exchange.

In the case where the matrix is rotated by 90 degrees, the up/down switching signals (X, U/D) and (Y, U/D) are set to "high" such that the line counting portion 22 performs count-down, and the exchange signal is set to "high" such that the address-exchanging portion 23 performs address exchange as shown in Fig. 13.

In the case where the matrix is rotated by 180 degrees, the up/down switching signals (X, U/D) and (Y, U/D) are set to "high" such that the dot counting portion 21 and the line counting portion 22 perform count-down and the exchange signal is set to "low" such that the address-exchanging portion 23 does not perform address exchange as shown in Fig. 14.

In the case where the matrix is rotated by 270 degrees, the up/down switching signal (X, U/D) is set to "high" such that the dot counting portion 21 performs count-down, the up/down switching signal (Y, U/D) is set to "low" such that the line counting portion 22 performs count-up, and the exchange signal is set to "high" such that the address-exchanging portion 23 performs address exchange as shown in Fig. 15.

Fig. 35 is a block diagram showing the specific circuit structure of a boundary-exchanging portion 24. The boundary-exchanging portion 24 includes a pair of selectors 241 and 242 for selecting a vertical synchronous signal (VSYNC, inverted signal) and a horizontal synchronous signal (HSYNC, inverted signal), and a pair of selectors 243 and 244 for selecting a subscanning direction matrix boundary signal (VB) and a main scanning direction matrix boundary signal (HB), respectively.

The selectors 241, 242, 243 and 244 are interlockingly switched by an exchange signal (EXCHANGE). The selectors 241 and 242 perform

selection by the exchange signal contrary to each other. When the exchange signal is set to "low", the selector 241 selects the vertical synchronous signal as an output (an XCLR inverted signal) and the selector 242 selects the horizontal synchronous signal as an output (a YCLR inverted signal). When the exchange signal is set to "high", the selection of the selectors 241 and 242 is reversed. Consequently, the outputs are opposed to each other.

Similarly, when the exchange signal is set to "low", the selector 243 selects the subscanning direction boundary signal (VB) as an output signal, XBCLK and the selector 244 selects the main scanning direction boundary signal (HB) as an output signal YBCLK. When the exchange signal is set to "high", the selection of the selectors 243 and 244 is reversed. Consequently, signals outputted from the selectors 243 and 244 are opposed to each other.

Fig. 36 is a block diagram showing the specific circuit structure of the matrix boundary counting portions 25 and 26. As apparent from Fig. 36, the matrix boundary counting portions 25 and 26 have the same circuit structure. In the case where the matrix boundary counting portion 25 is operated, signals which are not put in parentheses are provided or outputted. When the matrix boundary counting portion 26 is operated, signals which are put in parentheses are provided or outputted.

The matrix boundary counting portions 25 and 26 are circuits for generating adding addresses so as to sequentially shift the order of reading out memory tables to be used for a buffer processing as described above.

There will be described with reference to Fig. 36 the structure and operation of the matrix boundary counting portion 25 for counting main scanning direction matrix boundaries.

The boundary counting portion 25 includes a selector 251, an adder 252, a flip-flop 253, a selector 254, an adder 255, a comparator 256, and a selector 257. The selector 251 serves to select whether the set data (X, SHIFT) for a shifting value in the main scanning direction is outputted as it is or is inverted and outputted. The adder 252 serves to add an adding address (ADDX) and the output of the selector 251 together. The flip-flop 253 serves to hold the output of the adder 252. The selector 254 serves to switch the output of a set main scanning direction matrix size (X, SIZE) (actual matrix size - 1) and its inverted output. The adder 255 serves to add the outputs of the flip-flop 253 and selector 254 together. The comparator 256 serves to compare the output of the flip-flop 253 with the main scanning direction matrix size (X, SIZE), and derives an output when the output of the flip-flop 253 is greater than the main scanning direction matrix size (X, SIZE). The selector 257

serves to select the output of the flip-flop 253 and the adder 255 as an adding address (ADDX).

Also in this circuit, thin lines denote 1-bit signals and solid lines denote data and/or signal lines having a plurality of bits, and an arrow except inside denotes the set data of each parameter in similar to the above-mentioned circuits.

The circuit operation is greatly varied in the cases where an up/down switching signal (X_{U/D}) is "0" (count-up) and it is "1" (count-down).

There will be described the case where the up/down switching signal (X_{U/D}) is "0" (count-up).

In that case, data (X_{SHIFT}) for setting a shifting value in the main scanning direction is outputted from the selector 251 as it is, and then sent to the adder 252. Every time a boundary detecting clock (XBCLK) is sent from the boundary exchanging portion 24 (see Fig. 31), the adder 252 adds together the adding address (ADDX) outputted from the selector 257 and the output of the selector 251. The adding address (ADDX) outputted from the selector 257 is "0" until a processing is started.

The flip-flop 253 holds the output of the adder 252, and send the same to the selector 257, the adder 255, and the comparator 256.

The comparator 256 compares the data provided from the flip-flop 253 with a main scanning direction matrix size (X_{SIZE}). When the upper limit of data to be treated in view of a circuit is obtained, i.e., the output of the flip-flop 253 is greater than the main scanning direction matrix size (X_{SIZE}), the adder 255 adds together the output of the flip-flop 253 and the inverted output of the matrix size (X_{SIZE}) (actual matrix size - 1) outputted from the selector 254. In other words, an actual matrix size (X_{SIZE} + 1) is subtracted from the output of the flip-flop 253. In this case, the selector 257 selects the output of the adder 255.

In the case where the up/down switching signal (X_{U/D}) is "1" (count-down), the set data (X_{SHIFT}) for the shifting value in the main scanning direction is provided as an inverted negative value to the adder 252. Every time the main scanning direction boundary detecting clock (XBCLK) is provided, the output of the selector 257 is sent to the adder 252. The adder 252 subtracts the set data (X_{SHIFT}) from the adding address (ADDX).

The output of the adder 252 is held in the flip-flop 253 and sent to the adder 255, the selector 257 and the comparator 256.

Also in the case of the count-down, the data to be treated in view of a circuit has an upper limit. Consequently, the carry output of the adder 252 detects that a value obtained by the adder 252 is a negative number. In this case, the adder 255 adds together a negative value provided from the flip-flop 253 and the matrix size (X_{SIZE}) outputted

from the selector 254. Then, a result thus obtained and "1" are added together by the carry input of the adder 255. More specifically, the negative output of the flip-flop 253 and the actual matrix size (X_{SIZE} + 1) are added together. The selector 257 selects the output of the flip-flop 253 or the adder 255. Consequently, a negative value is not outputted from the selector 257.

According to the above-mentioned operation, addresses from "0" to the main scanning direction matrix size (X_{SIZE}) are outputted as the adding addresses (ADDX) from the matrix boundary counting portion 25.

Fig. 37 is a block diagram showing the specific circuit structure of the adding portions 27 and 28. As apparent from Fig. 37, the adding portions 27 and 28 have the same circuit structure. In the case of the adding portion 27, signals which are not put in parentheses are inputted or outputted. In the case of the adding portion 28, signals which are put in parentheses are inputted or outputted.

Also in this circuit, thin lines denote 1-bit signals and solid lines denote data and/or signal lines having a plurality of bits, and an arrow except inside denotes the set data of each parameter in similar to the above-mentioned circuits.

There will be described the circuit structure and operation of the adding portion 27 shown in Fig. 37.

The adding portion 27 serves to add an address generated by the dot counting portion 21 or the line counting portion 22 (see Fig. 31), i.e., an address (NOMX) outputted from the address exchanging portion 23 and an adding address (ADDX) generated by the matrix boundary counting portion 25 together, and to generate a main scanning direction matrix address (ADDR_X).

This circuit includes the adders 271 and 272, a comparator 273, a selector 274, and a flip-flop 275. The adder 271 serves to add an address (NOMX) and an adding address (ADDX) together. The adder 272 serves to add together the output of the adder 271 and the inverted value of matrix size data (X_{SIZE}). The comparator 273 serves to detect whether or not the output address of the adder 271 is greater than the matrix size data (X_{SIZE}). The selector 274 serves to select the output of the adder 271 or that of a result obtained by the adder 272. The flip-flop 275 serves to hold and derives an output in synchronous with a clock (CLK).

In the adding portion 27, the address (NOMX) and the adding address (ADDX) are first added together by the adder 271. A result obtained by the adder 271 is compared with a main scanning direction matrix size (X_{SIZE}) by the comparator 273. When the result of the adder 271 is greater than the matrix size, an actual matrix size (X_{SIZE} + 1) is subtracted from the result of the adder 271 by

the adder 272.

The output of the adder 271 or 272 is selected by the selector 274. The selected output is not greater than the matrix size. Finally, a matrix address (ADDR. X) is outputted from the flip-flop 275 in synchronism with the clock (CLK).

According to the device of the present embodiment, in the case where color image data is processed, a processing start position can be delayed, for example, by desired pixels in a main scanning direction. Consequently, the dither processing start positions of yellow data, magenta data and cyanogen data can be varied for each color data at the time of a color image data processing. As shown in Fig. 38, the dither processing start positions of yellow data, magenta data and cyanogen data can be shifted by 1 pixel in the main scanning direction respectively. Thus, if the dither processing start position is shifted for each color data, there can be obtained half-tone images of which color is rich in variety and natural gradation.

The matrix address generator according to the present invention is not limited to the above-mentioned embodiment having a specific hardware structure. Various changes can be made without departing from the scope of the invention.

By way of example, the matrix address generator according to the present invention cannot only generate horizontal and vertical addresses for specifying the memory table of the gradation data storage means 1 shown in Fig. 1 but can be used as shown in Fig. 39. More specifically, the matrix address generator may have a structure in which the address(es) of one of or a plurality of dither threshold matrix memories 4, 5, is(are) specified and the threshold of the specified address is compared with input data at the time of a dither processing.

Furthermore, the matrix address generator according to the present invention can be utilized for not only a multivalued dither processing but a binary dither processing.

Although the present invention has fully been described by way of example with reference to the accompanying drawings, it is to be understood that various changes and modifications will be apparent to those skilled in the art. Therefore, unless otherwise such changes and modifications depart from the scope of the invention, they should be construed as being included therein.

Claims

1. A matrix address generator for generating X and Y addresses, characterized by: dot counting means (21) for repeatedly counting X pulses to be provided within a first counted value range which is predetermined,

line counting means (22) for repeatedly counting Y pulses to be provided within a second counted value range which is predetermined, and outputting counted values as Y addresses, X shift address counting means (25) for repeatedly counting within a predetermined counted value range shift addresses which shift X addresses, and adding means (27) for adding together values counted by the dot counting means (21) and values counted by the X shift address counting means (25) in synchronous with the X pulses, and outputting addition values as the X addresses.

2. The matrix address generator according to claim 1, characterized in that the dot counting means (21) includes start timing shift means (214) for delaying counting start operation until a predetermined number of X pulses are provided.
3. A matrix address generator for generating X and Y addresses, characterized by: dot counting means (21) for repeatedly counting X pulses to be provided within a first counted value range which is predetermined, and outputting counted values as X addresses, line counting means (22) for repeatedly counting Y pulses to be provided within a second counted value range which is predetermined, Y shift address counting means (26) for repeatedly counting within a predetermined counted value range shift addresses which shift Y addresses, and adding means (28) for adding together values counted by the line counting means (22) and values counted by the Y shift address counting means (26) in synchronous with the X pulses, and outputting addition values as the Y addresses.
4. The matrix address generator according to claim 3, characterized in that the line counting means (22) includes start timing shift means (214) for delaying counting start operation until a predetermined number of Y pulses are provided.
5. A matrix address generator for generating X and Y addresses, characterized by: dot counting means (21) for repeatedly counting X pulses to be provided within a first counted value range which is predetermined, line counting means (22) for repeatedly counting Y pulses to be provided within a second

counted value range which is predetermined, the X shift address counting means (25) for repeatedly counting within a predetermined counted value range shift addresses which shift X addresses;

Y shift address counting means (26) for repeatedly counting within a predetermined counted value range shift addresses which shift Y addresses;

selecting means (24) for selectively operating the X or Y shift address counting means (25) or (26);

X address adding means (27) for adding together values counted by the X shift address counting means (25) and values counted by

the dot counting means (21) in synchronous with the X pulses when the X shift address counting means (25) is selected by the selecting means (24); and outputting addition values

as the X addresses; and

Y address adding means (28) for adding together values counted by the Y shift address counting means (26) and values counted by

the line counting means (22) in synchronous with the X pulses when the Y shift address counting means (26) is selected by the selecting means (24); and outputting addition values

as the Y addresses.

6. The matrix address generator according to claim 5, characterized in that the dot counting means (21) includes start timing shift means (214) for delaying counting start operation until a predetermined number of X pulses are provided.

7. The matrix address generator according to claim 5, characterized in that the line counting means (22) includes start timing shift means (214) for delaying counting start operation until a predetermined number of Y pulses are provided.

8. A matrix address generator for generating X and Y addresses, characterized by: dot counting means (21) for repeatedly counting X pulses to be provided within a first counted value range which is predetermined; and outputting counted values as X addresses; line counting means (22) for repeatedly counting Y pulses to be provided within a second counted value range which is predetermined; and outputting counted values as Y addresses; and dot counting, start timing shift means (214) for delaying the counting start operation of the dot

counting means (21) until a predetermined number of X pulses are provided.

9. A matrix address generator for generating X and Y addresses, characterized by:

dot counting means (21) for repeatedly counting X pulses to be provided within a first counted value range which is predetermined; and outputting counted values as X addresses;

line counting means (22) for repeatedly counting Y pulses to be provided within a second counted value range which is predetermined; and outputting counted values as Y addresses;

and line counting start timing shift means (214) for delaying the counting start operation of the line counting means (22) until a predetermined number of Y pulses are provided.

10. A matrix address generator for generating X and Y addresses, characterized by:

dot counting means (21) for repeatedly counting down X pulses to be provided within a first counted value range which is predetermined; and outputting counted values as X addresses;

and line counting means (22) for repeatedly counting down Y pulses to be provided within a second counted value range which is predetermined; and outputting counted values as Y addresses;

11. A matrix address generator for generating X and Y addresses, characterized by:

dot counting means (21) for repeatedly counting X pulses to be provided within a first counted value range which is predetermined; and outputting counted values as X addresses;

line counting means (22) for repeatedly counting Y pulses to be provided within a second counted value range which is predetermined; and outputting counted values as Y addresses;

address exchanging means (23) for exchanging values counted by the dot counting means (21) for values counted by the line counting means (22) and outputting the same;

X address outputting means (231) for outputting as X addresses the counted values of the line counting means which are processed by the address exchanging means; and Y address outputting means (232) for outputting as Y addresses the counted values of the dot counting means which are processed by the address exchanging means.

12. The matrix address generator according to claim 11, characterized in that

the dot counting means (21) serves to perform count-up and the line counting means (22) serves to perform count-down.

13. The matrix address generator, according to claim 11, characterized in that the dot counting means (21) serves to perform count-down and the line counting means (22) serves to perform count-up.

14. The matrix address generator, according to claim 11, characterized in that the address exchanging means (23), includes exchange switching means (231, 232) for switching whether the counted values of the dot counting means and line counting means are exchanged for each other and are output.

15. A matrix address generator for generating X and Y addresses, characterized by dot counting means (21) for repeatedly counting X pulses to be provided within a first counted value range which is predetermined, line counting means (22) for repeatedly counting Y pulses to be provided within a second counted value range which is predetermined, X shift address counting means (25) for repeatedly counting shift addresses which shift X addresses, boundary signal outputting means (24) for detecting repeat timings in which the dot counting means (21) repeatedly performs counting within the first counted value range and the line counting means (22) repeatedly performs counting within the second counted value range, and sending either of the repeat timings of the dot and line counting means (21, 22) as a counting repeat timing signal to the X shift address counting means (25), address exchanging means (23) for exchanging values as counted by the dot counting means (21) for values counted by the line counting means (22) and outputting the same, Y address outputting means (28) for outputting as Y addresses the counted values of the dot counting means (21) which are processed by the address exchanging means (23), pre-X address outputting means for outputting as pre-X addresses the counted values of the line counting means (22) which are processed by the address exchanging means, and adding means for adding together values as counted by the pre-X address outputting means and values counted by the X shift address counting means in synchronous with the X pulses, and outputting addition values as the X addresses.

16. The matrix address generator, according to claim 15, characterized in that

the address exchanging means (23) includes exchange switching means (231, 232) for switching whether the counted values of the dot counting means (21) and line counting means (22) are exchanged for each other and are output.

17. The matrix address generator according to claim 16, characterized in that

the boundary signal outputting means (25, 26) can switch the state in which the repeat timing of the dot counting means (21) is provided to the X shift address counting means and the repeat timing of the line counting means (22) is provided to the Y shift address counting means, and the state in which the repeat timing of the dot counting means (21) is provided

to the Y shift address counting means and the repeat timing of the line counting means (22) is provided to the X shift address counting means, and wherein the boundary signal outputting means (25, 26) and exchange switching means (231, 232) perform switching based on the same switching signal.

18. A matrix address generator for generating X and Y addresses, characterized by dot counting means (21) for repeatedly counting X pulses to be provided within a first counted value range which is predetermined, line counting means (22) for repeatedly counting Y pulses to be provided within a second counted value range which is predetermined, X shift address counting means (26) for repeatedly counting shift addresses which shift Y addresses, boundary signal outputting means (24) for detecting repeat timings in which the dot counting means (21) repeatedly performs counting within the first counted value range and the line counting means (22) repeatedly performs counting within the second counted value range, and sending either of the repeat timings of the dot and line counting means (21, 22) as a counting repeat timing signal to the Y shift address counting means (26), address exchanging means (23) for exchanging values as counted by the dot counting means (21) for values counted by the line counting means (22) and outputting the same, X address outputting means (27) for outputting as X addresses the counted values of the line counting means (21) which are processed by the address exchanging means (23), pre-Y address outputting means for outputting as pre-Y addresses the counted values of the dot counting means (21) which are processed

by the address exchanging means and adding means for adding together values counted by the pre-Y address outputting means and values counted by the Y shift address counting means in synchronous with the X pulses, and outputting addition values as the Y addresses.

19. The matrix address generator according to claim 18, characterized in that the address exchanging means (23) includes exchange switching means (231, 232) for switching whether the counted values of the dot counting means (21) and line counting means (22) are exchanged for each other and are outputted as pre-X addresses and pre-Y addresses.
20. The matrix address generator according to claim 19, characterized in that the boundary signal outputting means (25, 26) can switch the state in which the repeat timing of the dot counting means (21) is provided to the X shift address counting means and the repeat timing of the line counting means (22) is provided to the Y shift address counting means, and the state in which the repeat timing of the dot counting means (21) is provided to the Y shift address counting means and the repeat timing of the line counting means (22) is provided to the X shift address counting means, and wherein the boundary signal outputting means and exchange switching means (231, 232) perform switching based on the same switching signal.
21. A matrix address generator for generating X and Y addresses, characterized by: dot counting means (21) for repeatedly counting X pulses to be provided within a first counted value range which is predetermined; line counting means (22) for repeatedly counting Y pulses to be provided within a second counted value range which is predetermined; X shift address counting means (25) for repeatedly counting shift addresses which shift X addresses; Y shift address counting means (26) for repeatedly counting shift addresses which shift Y addresses; and boundary signal outputting means (24) for detecting repeat timings in which the dot counting means (21) repeatedly performs counting within the first counted value range and the line counting means (22) repeatedly performs counting within the second counted value range,

range, sending one of the repeat timings of the dot and line counting means (21, 22) as a counting repeat timing signal to the X shift address counting means (25), and sending the other repeat timing as a counting repeat timing signal to the Y shift address counting means (26).

- address exchanging means (23) for exchanging values counted by the dot counting means (21) for values counted by the line counting means (22) and outputting the same as pre-X addresses outputting means for outputting as pre-X addresses the counted values of the line counting means (22) which are processed by the address exchanging means, and pre-Y address outputting means for outputting as pre-Y addresses the counted values of the dot counting means (21) which are processed by the address exchanging means,
- selecting means for selectively operating the X or Y shift address counting means,
- X address adding means (27) for adding together values counted by the X shift address counting means and values counted by the pre-X address outputting means in synchronous with the X pulses when the X shift address counting means is selected by the selecting means, and outputting addition values as the X addresses, and
- Y address adding means (28) for adding together values counted by the Y shift address counting means and values counted by the pre-Y address outputting means in synchronous with the X pulses when the Y shift address counting means is selected by the selecting means, and outputting addition values as the Y addresses.
22. The matrix address generator according to claim 21, characterized in that the address exchanging means (23) includes exchange switching means (231, 232) for switching whether the counted values of the dot counting means (21) and line counting means (22) are exchanged for each other and are outputted as pre-X addresses and pre-Y addresses.
23. The matrix address generator according to claim 22, characterized in that the boundary signal outputting means (24) can switch the state in which the repeat timing of the dot counting means (21) is provided to the X shift address counting means and the repeat timing of the line counting means (22) is provided to the Y shift address counting means, and the state in which the repeat timing of the

dot counting means (21) is provided to the Y shift address counting means and the repeat timing of the line counting means (22) is provided to the X shift address counting means, and

wherein the boundary signal outputting means and exchange switching means perform switching based on the same switching signal.

24. A multivalue gradation processor for images characterized by
- multivalue gradation data storage means (1) including a plurality of memory tables (4, 5) in which multivalue gradation data are stored and which can be selected by X and Y addresses, a matrix address generator (2) which outputs the X and Y addresses to the multivalue gradation data storage means (4, 5) and has a structure according to any of claims 1 to 17, and
 - multivalue processing means (6, 7) for performing a multivalue gradation processing on input data based on the contents of the multivalue gradation data stored in the memory table selected by the X and Y addresses which are output from the matrix address generator (2).

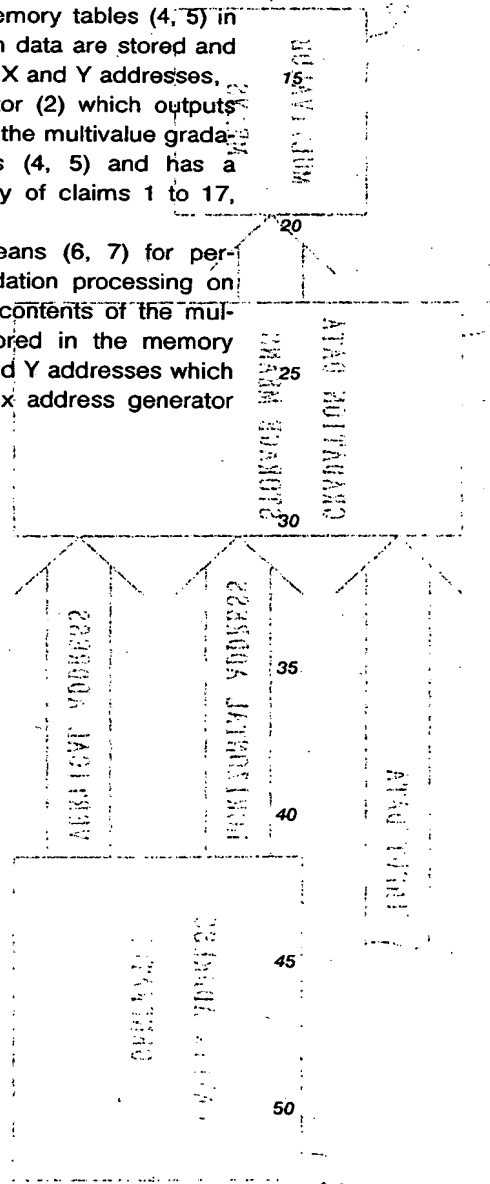


FIG. 1

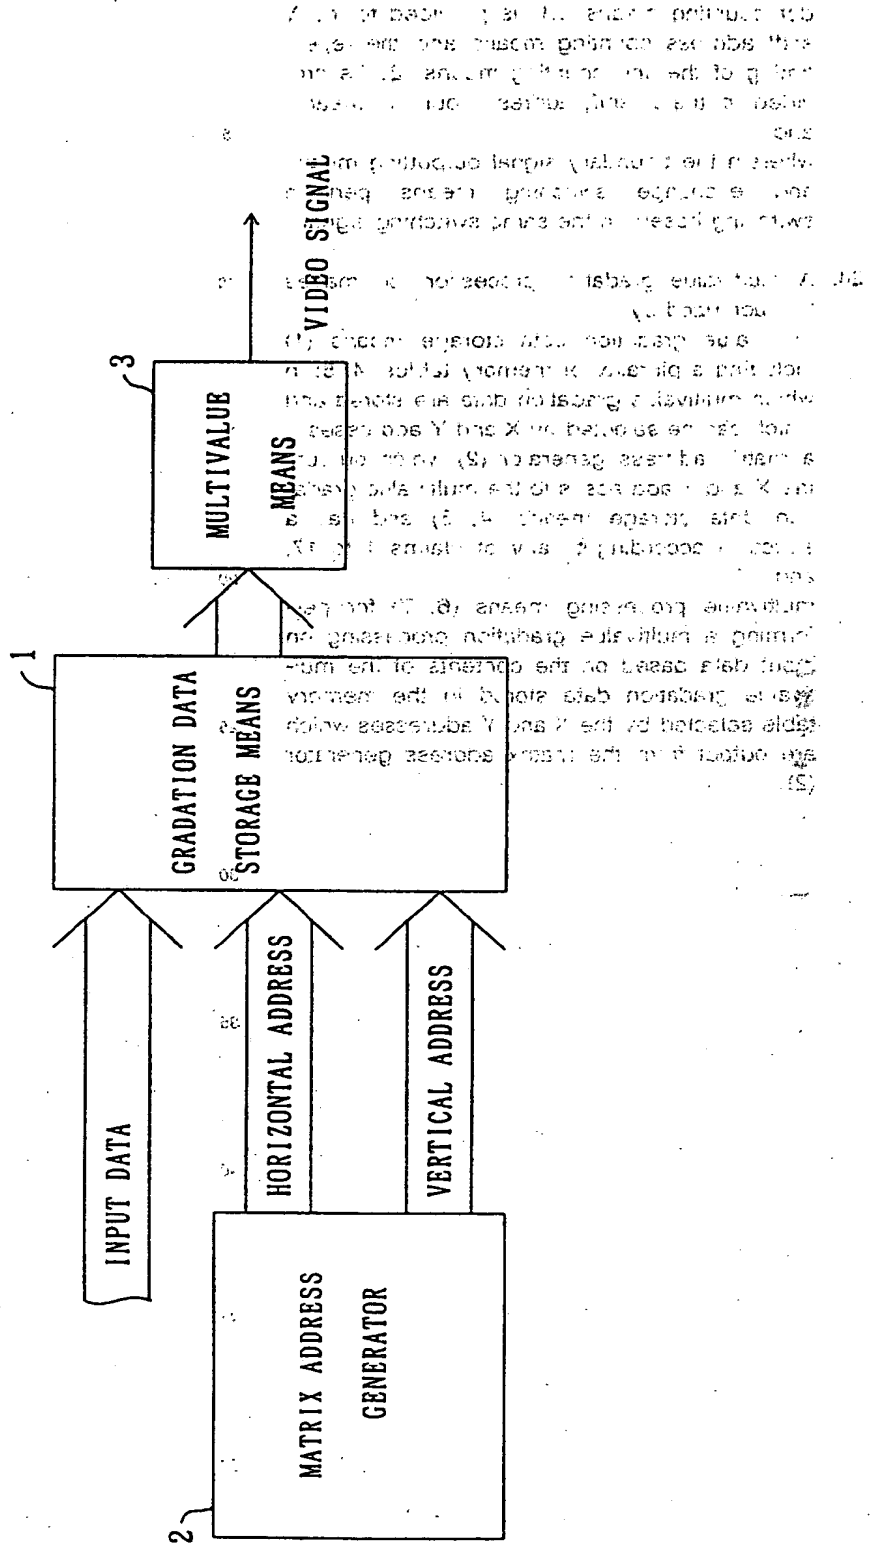


FIG. 2

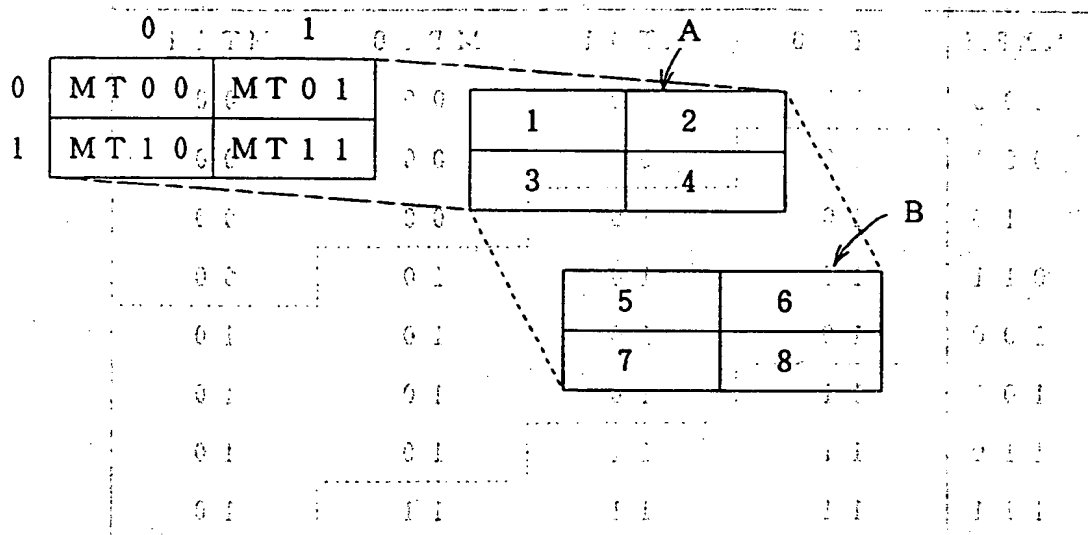


FIG. 3

ADDRESS		MEMORY TABLE	
		0 0 0 0	MT 0 0
		0 0 0 1	MT 0 1
0 0 TM	0 0 TM	0 1 0 0	MT 1 0
0 1 TM	0 1 TM	0 1 0 1	MT 1 1
0 0 TM	0 0 TM		
0 1 TM	0 1 TM		

FIG. 4

INPUT	OUTPUT			
ADDRESS	MT 0 0	MT 0 1	MT 1 0	MT 1 1
0 0 0	0 0	0 0	0 0	0 0
0 0 1	1 0	0 0	0 0	0 0
0 1 0	1 0	1 0	0 0	0 0
0 1 1	1 0	1 0	1 0	0 0
1 0 0	1 0	1 0	1 0	1 0
1 0 1	1 1	1 0	1 0	1 0
1 1 0	1 1	1 1	1 0	1 0
1 1 1	1 1	1 1	1 1	1 0

FIG. 5

013AT YRC EM 203X00A

X DIRECTION ADDRESS

0	MT 0 0	MT 0 1	MT 0 2	MT 0 3
1	MT 1 0	MT 1 1	MT 1 2	MT 1 3
2	MT 2 0	MT 2 1	MT 2 2	MT 2 3
3	MT 3 0	MT 3 1	MT 3 2	MT 3 3

Y DIRECTION ADDRESS


FIG. 6

TABLE ADDRESS		
0 0	0 0	MT 0 0
0 0	0 1	MT 0 1
0 0	1 0	MT 0 2
0 0	1 1	MT 0 3
0 1	0 0	MT 1 0
0 1	0 1	MT 1 1
0 1	1 0	MT 1 2
0 1	1 1	MT 1 3
1 0	0 0	MT 2 0
1 0	0 1	MT 2 1
1 0	1 0	MT 2 2
1 0	1 1	MT 2 3
1 1	0 0	MT 3 0
1 1	0 1	MT 3 1
1 1	1 0	MT 3 2
1 1	1 1	MT 3 3

[BINARY REPRESENTATION]

FIG. 7

(A)

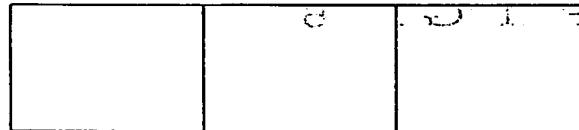

(B)


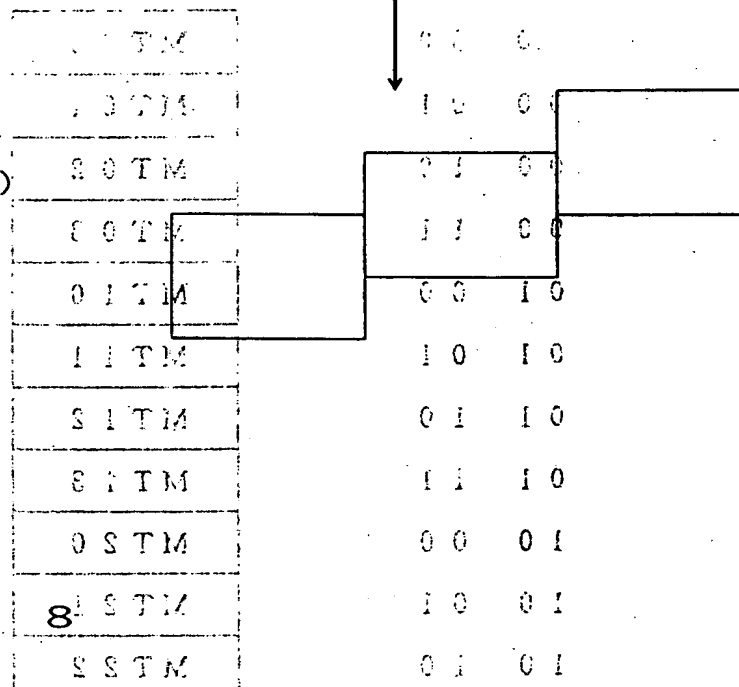


FIG. 8

(A)

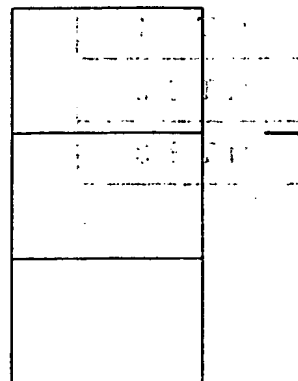

(B)

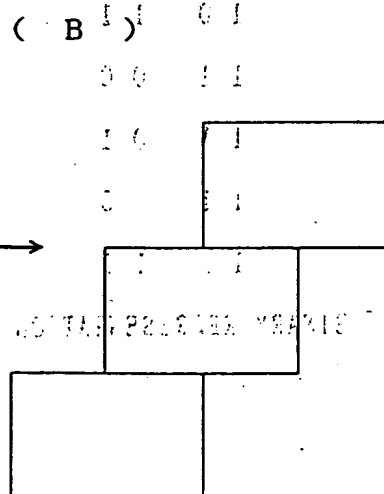


FIG. 9

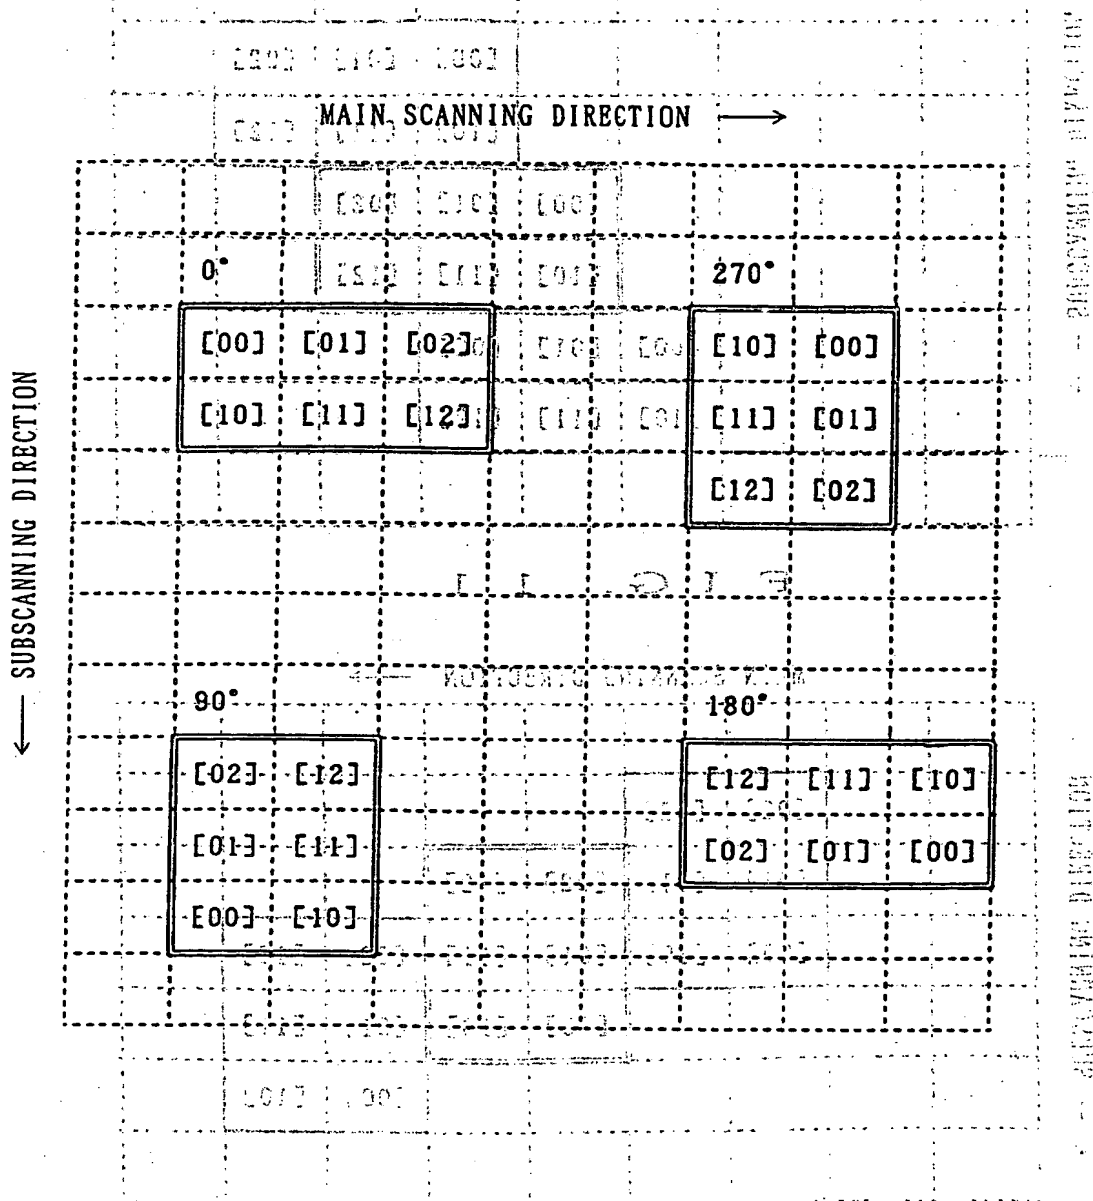


FIG. 10

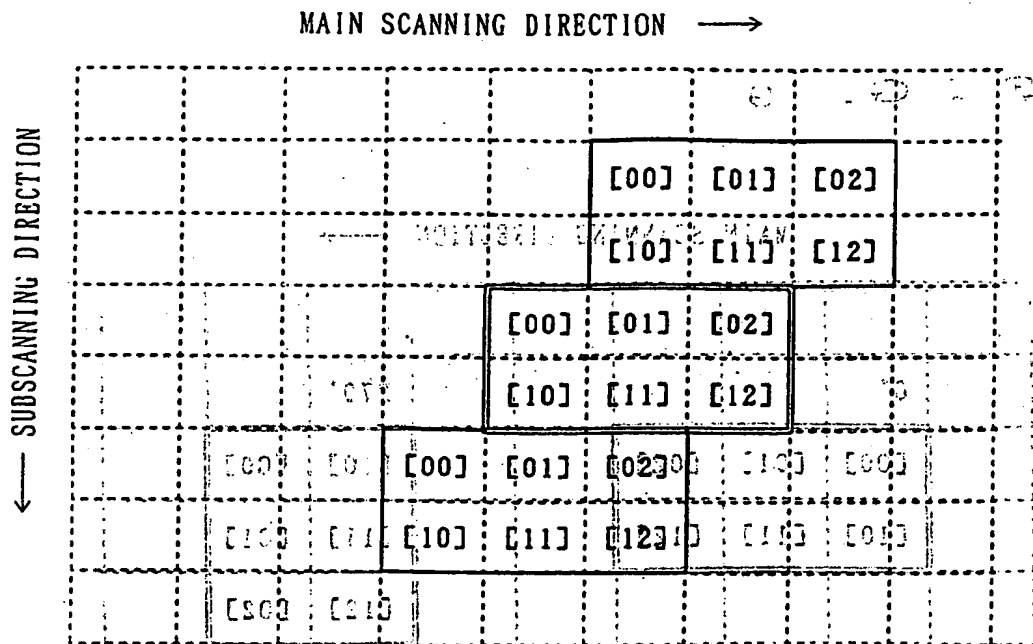


FIG. 11

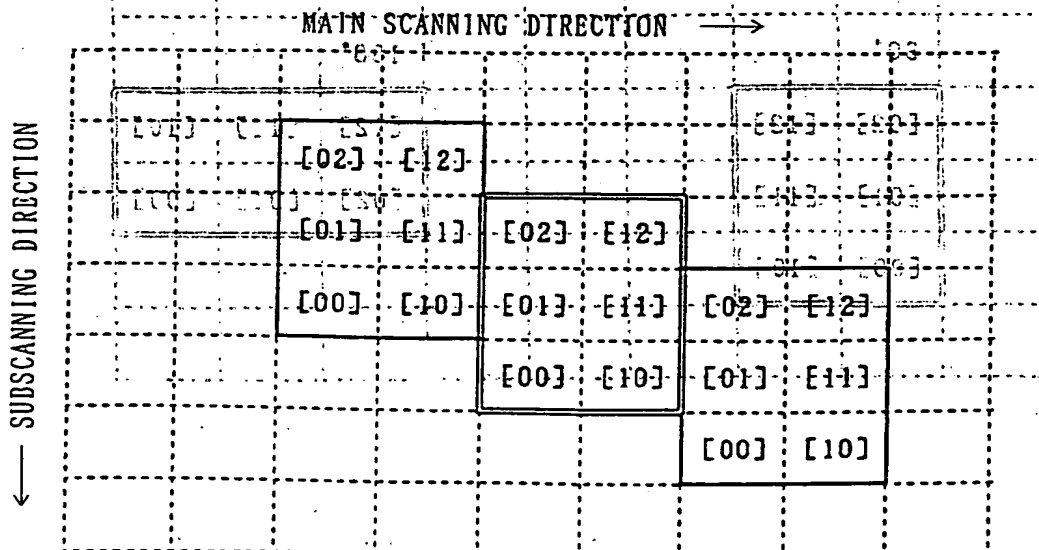


FIG. 1 2

NORMAL STATE

EXCHANGE: 0, X_U/D: 0, Y_U/D: 0
 X_SIZE: 3, X_START: 0, X_SHIFT: 0
 Y_SIZE: 3, Y_START: 0, Y_SHIFT: 0

SUBSCANNING DIRECTION

MAIN SCANNING DIRECTION →

00	01	02	03	00	01	02	03	00	01	02	03	00	01	02	03
10	11	12	13	10	11	12	13	10	11	12	13	10	11	12	13
20	21	22	23	20	21	22	23	20	21	22	23	20	21	22	23
30	31	32	33	30	31	32	33	30	31	32	33	30	31	32	33
00	01	02	03	00	01	02	03	00	01	02	03	00	01	02	03
10	11	12	13	10	11	12	13	10	11	12	13	10	11	12	13
20	21	22	23	20	21	22	23	20	21	22	23	20	21	22	23
30	31	32	33	30	31	32	33	30	31	32	33	30	31	32	33

FIG. 1 3

90° ROTATION

EXCHANGE: 1, X_U/D: 0, Y_U/D: 1
 X_SIZE: 3, X_START: 0, X_SHIFT: 0
 Y_SIZE: 3, Y_START: 0, Y_SHIFT: 0

03	13	23	33	03	13	23	33	03	13	23	33	03	13	23	33
02	12	22	32	02	12	22	32	02	12	22	32	02	12	22	32
01	11	21	31	01	11	21	31	01	11	21	31	01	11	21	31
00	10	20	30	00	10	20	30	00	10	20	30	00	10	20	30
03	13	23	33	03	13	23	33	03	13	23	33	03	13	23	33
02	12	22	32	02	12	22	32	02	12	22	32	02	12	22	32
01	11	21	31	01	11	21	31	01	11	21	31	01	11	21	31
00	10	20	30	00	10	20	30	00	10	20	30	00	10	20	30

FIG. 14

180° ROTATION

EXCHANGE: 0, X_U/D: 1, Y_U/D: 1
 X_SIZE: 3, X_START: 0, X_SHIFT: 0
 Y_SIZE: 3, Y_START: 0, Y_SHIFT: 0

33	32	31	30	33	32	31	30	33	32	31	30	33	32	31	30	31
23	22	21	20	23	22	21	20	23	22	21	20	23	22	21	20	20
13	12	11	10	13	12	11	10	13	12	11	10	13	12	11	10	10
03	02	01	00	03	02	01	00	03	02	01	00	03	02	01	00	00
33	32	31	30	33	32	31	30	33	32	31	30	33	32	31	30	31
23	22	21	20	23	22	21	20	23	22	21	20	23	22	21	20	20
13	12	11	10	13	12	11	10	13	12	11	10	13	12	11	10	10
03	02	01	00	03	02	01	00	03	02	01	00	03	02	01	00	00

FIG. 15

270° ROTATION

EXCHANGE: 1, X_U/D: 1, Y_U/D: 0
 X_SIZE: 3, X_START: 0, X_SHIFT: 0
 Y_SIZE: 3, Y_START: 0, Y_SHIFT: 0

30	20	10	00	30	20	10	00	30	20	10	00	30	20	10	00	30
31	21	11	01	31	21	11	01	31	21	11	01	31	21	11	01	30
32	22	12	02	32	22	12	02	32	22	12	02	32	22	12	02	20
33	23	13	03	33	23	13	03	33	23	13	03	33	23	13	03	10
30	20	10	00	30	20	10	00	30	20	10	00	30	20	10	00	30
31	21	11	01	31	21	11	01	31	21	11	01	31	21	11	01	20
32	22	12	02	32	22	12	02	32	22	12	02	32	22	12	02	10
33	23	13	03	33	23	13	03	33	23	13	03	33	23	13	03	00

FIG. 16

SHIFT BY 1 PIXEL IN A MAIN SCANNING DIRECTION
BETWEEN MATRICES IN A SUBSCANNING DIRECTION

EXCHANGE: 0, X_U/D: 0, Y_U/D: 0
X_SIZE: 3, X_START: 0, X_SHIFT: 1
Y_SIZE: 3, Y_START: 0, Y_SHIFT: 0

00	01	02	03	00	01	02	03	00	01	02	03	00	01	02	03
10	11	12	13	10	11	12	13	10	11	12	13	10	11	12	13
20	21	22	23	20	21	22	23	20	21	22	23	20	21	22	23
30	31	32	33	30	31	32	33	30	31	32	33	30	31	32	33
01	02	03	00	01	02	03	00	01	02	03	00	01	02	03	00
11	12	13	10	11	12	13	10	11	12	13	10	11	12	13	10
21	22	23	20	21	22	23	20	21	22	23	20	21	22	23	20
31	32	33	30	31	32	33	30	31	32	33	30	31	32	33	30
02	03	00	01	02	03	00	01	02	03	00	01	02	03	00	01

FIG. 17

SHIFT BY 2 PIXELS IN A MAIN SCANNING DIRECTION
BETWEEN MATRICES IN A SUBSCANNING DIRECTION

EXCHANGE: 0, X_U/D: 0, Y_U/D: 0
X_SIZE: 3, X_START: 0, X_SHIFT: 2
Y_SIZE: 3, Y_START: 0, Y_SHIFT: 0

00	01	02	03	00	01	02	03	00	01	02	03	00	01	02	03
10	11	12	13	10	11	12	13	10	11	12	13	10	11	12	13
20	21	22	23	20	21	22	23	20	21	22	23	20	21	22	23
30	31	32	33	30	31	32	33	30	31	32	33	30	31	32	33
02	03	00	01	02	03	00	01	02	03	00	01	02	03	00	01
12	13	10	11	12	13	10	11	12	13	10	11	12	13	10	11
22	23	20	21	22	23	20	21	22	23	20	21	22	23	20	21
32	33	30	31	32	33	30	31	32	33	30	31	32	33	30	31
00	01	02	03	00	01	02	03	00	01	02	03	00	01	02	03

FIG. 18

SHIFT BY 3 PIXELS IN A MAIN SCANNING DIRECTION
BETWEEN MATRICES IN A SUBSCANNING DIRECTION

EXCHANGE: 0, X_U/D: 0, Y_U/D: 0

X_SIZE: 3, X_START: 0, X_SHIFT: 3

Y_SIZE: 3, Y_START: 0, Y_SHIFT: 0

00	01	02	03	00	01	02	03	00	01	02	03	00	01	02	03
10	11	12	13	10	11	12	13	10	11	12	13	10	11	12	13
20	21	22	23	20	21	22	23	20	21	22	23	20	21	22	23
30	31	32	33	30	31	32	33	30	31	32	33	30	31	32	33
03	00	01	02	03	00	01	02	03	00	01	02	03	00	01	02
13	10	11	12	13	10	11	12	13	10	11	12	13	10	11	12
23	20	21	22	23	20	21	22	23	20	21	22	23	20	21	22
33	30	31	32	33	30	31	32	33	30	31	32	33	30	31	32
02	03	00	01	02	03	00	01	02	03	00	01	02	03	00	01

FIG. 19

SHIFT BY 1 PIXEL IN A SUBSCANNING DIRECTION
BETWEEN MATRICES IN A MAIN SCANNING DIRECTION

EXCHANGE: 0, X_U/D: 0, Y_U/D: 0

X_SIZE: 3, X_START: 0, X_SHIFT: 0

Y_SIZE: 3, Y_START: 0, Y_SHIFT: 1

00	01	02	03	10	11	12	13	20	21	22	23	30	31	32	33
10	11	12	13	20	21	22	23	30	31	32	33	00	01	02	03
20	21	22	23	30	31	32	33	00	01	02	03	10	11	12	13
30	31	32	33	00	01	02	03	10	11	12	13	20	21	22	23
00	01	02	03	10	11	12	13	20	21	22	23	30	31	32	33
10	11	12	13	20	21	22	23	30	31	32	33	00	01	02	03
20	21	22	23	30	31	32	33	00	01	02	03	10	11	12	13
30	31	32	33	00	01	02	03	10	11	12	13	20	21	22	23
00	01	02	03	10	11	12	13	20	21	22	23	30	31	32	33

FIG. 20

SHIFT BY 2 PIXELS IN A SUBSCANNING DIRECTION
BETWEEN MATRICES IN A MAIN SCANNING DIRECTION

EXCHANGE: 0, X_U/D: 0, Y_U/D: 0
X_SIZE: 3, X_START: 0, X_SHIFT: 0
Y_SIZE: 3, Y_START: 0, Y_SHIFT: 2

00	01	02	03	20	21	22	23	00	01	02	03	20	21	22	23
10	11	12	13	30	31	32	33	10	11	12	13	30	31	32	33
20	21	22	23	00	01	02	03	20	21	22	23	00	01	02	03
30	31	32	33	10	11	12	13	30	31	32	33	10	11	12	13
00	01	02	03	20	21	22	23	00	01	02	03	20	21	22	23
10	11	12	13	30	31	32	33	10	11	12	13	30	31	32	33
20	21	22	23	00	01	02	03	20	21	22	23	00	01	02	03
30	31	32	33	10	11	12	13	30	31	32	33	10	11	12	13
00	01	02	03	20	21	22	23	00	01	02	03	20	21	22	23
10	11	12	13	30	31	32	33	10	11	12	13	30	31	32	33
20	21	22	23	00	01	02	03	20	21	22	23	00	01	02	03
30	31	32	33	10	11	12	13	30	31	32	33	10	11	12	13
00	01	02	03	20	21	22	23	00	01	02	03	20	21	22	23
10	11	12	13	30	31	32	33	10	11	12	13	30	31	32	33

FIG. 21

SHIFT BY 3 PIXELS IN A SUBSCANNING DIRECTION
BETWEEN MATRICES IN A MAIN SCANNING DIRECTION

EXCHANGE: 0, X_U/D: 0, Y_U/D: 0
X_SIZE: 3, X_START: 0, X_SHIFT: 0
Y_SIZE: 3, Y_START: 0, Y_SHIFT: 3

00	01	02	03	30	31	32	33	20	21	22	23	10	11	12	13
10	11	12	13	00	01	02	03	30	31	32	33	20	21	22	23
20	21	22	23	10	11	12	13	00	01	02	03	30	31	32	33
30	31	32	33	20	21	22	23	10	11	12	13	00	01	02	03
00	01	02	03	30	31	32	33	20	21	22	23	10	11	12	13
10	11	12	13	00	01	02	03	30	31	32	33	20	21	22	23
20	21	22	23	10	11	12	13	00	01	02	03	30	31	32	33
30	31	32	33	20	21	22	23	10	11	12	13	00	01	02	03
00	01	02	03	30	31	32	33	20	21	22	23	10	11	12	13
10	11	12	13	00	01	02	03	30	31	32	33	20	21	22	23

1946-1947
GRANDFATHER IN THE HOUSE

BY 1-PIXEL IN A MAIN SCANNING DIRECTION

1. NAME _____

U/D: 0
SHLET: 0

SHIFT:	0	05	01	10	05	10	10	10
--------	---	----	----	----	----	----	----	----

[illegible]

15. OCT 1951

SCANNING DIRECTION

U/D: 0

SHIFT: 0

10-175142 X 10-175143 X 10-175144 X

00	00	00	01	02	03	00	01	02	03	00	01	02	03	00	01
10	10	10	11	12	13	10	11	12	13	10	11	12	13	10	11
20	20	20	21	22	23	20	21	22	23	20	21	22	23	20	21
30	30	30	31	32	33	30	31	32	33	30	31	32	33	30	31
00	00	00	01	02	03	00	01	02	03	00	01	02	03	00	01
10	10	10	11	12	13	10	11	12	13	10	11	12	13	10	11
20	20	20	21	22	23	20	21	22	23	20	21	22	23	20	21
30	30	30	31	32	33	30	31	32	33	30	31	32	33	30	31

FIG. 24

DELAY A PROCESSING START POSITION BY 3 PIXELS IN A MAIN SCANNING DIRECTION

EXCHANGE: 0, X_U/D: 0, Y_U/D: 0
 X_SIZE: 3, X_START: 3, X_SHIFT: 0
 Y_SIZE: 3, Y_START: 0, Y_SHIFT: 0

00	00	00	00	01	02	03	00	01	02	03	00	01	02	03	00
10	10	10	10	11	12	13	10	11	12	13	10	11	12	13	10
20	20	20	20	21	22	23	20	21	22	23	20	21	22	23	20
30	30	30	30	31	32	33	30	31	32	33	30	31	32	33	30
00	00	00	00	01	02	03	00	01	02	03	00	01	02	03	00
10	10	10	10	11	12	13	10	11	12	13	10	11	12	13	10
20	20	20	20	21	22	23	20	21	22	23	20	21	22	23	20
30	30	30	30	31	32	33	30	31	32	33	30	31	32	33	30

FIG. 25

DELAY A PROCESSING START POSITION BY 1 PIXEL IN A SUBSCANNING DIRECTION

EXCHANGE: 0, X_U/D: 0, Y_U/D: 0
 X_SIZE: 3, X_START: 0, X_SHIFT: 0
 Y_SIZE: 3, Y_START: 1, Y_SHIFT: 0

00	01	02	03	00	01	02	03	00	01	02	03	00	01	02	03
00	01	02	03	00	01	02	03	00	01	02	03	00	01	02	03
10	11	12	13	10	11	12	13	10	11	12	13	10	11	12	13
20	21	22	23	20	21	22	23	20	21	22	23	20	21	22	23
30	31	32	33	30	31	32	33	30	31	32	33	30	31	32	33
00	01	02	03	00	01	02	03	00	01	02	03	00	01	02	03
10	11	12	13	10	11	12	13	10	11	12	13	10	11	12	13
20	21	22	23	20	21	22	23	20	21	22	23	20	21	22	23

FIG. 26

DELAY A PROCESSING START POSITION BY 2 PIXELS IN A SUBSCANNING DIRECTION

EXCHANGE: 0, X_U/D: 0, Y_U/D: 0
 X_SIZE: 3, X_START: 0, X_SHIFT: 0
 Y_SIZE: 3, Y_START: 2, Y_SHIFT: 0

00	01	02	03	00	01	02	03	00	01	02	03	00	01	02	03
00	01	02	03	00	01	02	03	00	01	02	03	00	01	02	03
00	01	02	03	00	01	02	03	00	01	02	03	00	01	02	03
10	11	12	13	10	11	12	13	10	11	12	13	10	11	12	13
20	21	22	23	20	21	22	23	20	21	22	23	20	21	22	23
30	31	32	33	30	31	32	33	30	31	32	33	30	31	32	33
00	01	02	03	00	01	02	03	00	01	02	03	00	01	02	03
10	11	12	13	10	11	12	13	10	11	12	13	10	11	12	13

FIG. 27

DELAY A PROCESSING START POSITION BY 3 PIXELS IN A SUBSCANNING DIRECTION

EXCHANGE: 0, X_U/D: 0, Y_U/D: 0
 X_SIZE: 3, X_START: 0, X_SHIFT: 0
 Y_SIZE: 3, Y_START: 3, Y_SHIFT: 0

00	01	02	03	00	01	02	03	00	01	02	03	00	01	02	03
00	01	02	03	00	01	02	03	00	01	02	03	00	01	02	03
00	01	02	03	00	01	02	03	00	01	02	03	00	01	02	03
00	01	02	03	00	01	02	03	00	01	02	03	00	01	02	03
10	11	12	13	10	11	12	13	10	11	12	13	10	11	12	13
20	21	22	23	20	21	22	23	20	21	22	23	20	21	22	23
30	31	32	33	30	31	32	33	30	31	32	33	30	31	32	33
00	01	02	03	00	01	02	03	00	01	02	03	00	01	02	03

F I G . 2 8

(SHIFT BY 1 PIXEL IN A MAIN SCANNING DIRECTION)
(BETWEEN MATRICES IN A SUBSCANNING DIRECTION) + (90° ROTATION)

EXCHANGE: 1, X_U/D: 0, Y_U/D: 1
X_SIZE: 3, X_START: 0, X_SHIFT: 1
Y_SIZE: 3, Y_START: 0, Y_SHIFT: 0

03	13	23	33	00	10	20	30	01	11	21	31	02	12	22	32
02	12	22	32	03	13	23	33	00	10	20	30	01	11	21	31
01	11	21	31	02	12	22	32	03	13	23	33	00	10	20	30
00	10	20	30	01	11	21	31	02	12	22	32	03	13	23	33
03	13	23	33	00	10	20	30	01	11	21	31	02	12	22	32
02	12	22	32	03	13	23	33	00	10	20	30	01	11	21	31
01	11	21	31	02	12	22	32	03	13	23	33	00	10	20	30
00	10	20	30	01	11	21	31	02	12	22	32	03	13	23	33
03	13	23	33	00	10	20	30	01	11	21	31	02	12	22	32

F I G . 2 9

(SHIFT BY 1 PIXEL IN A MAIN SCANNING DIRECTION)
(BETWEEN MATRICES IN A SUBSCANNING DIRECTION) + (180° ROTATION)

EXCHANGE: 0, X_U/D: 1, Y_U/D: 1
X_SIZE: 3, X_START: 0, X_SHIFT: 1
Y_SIZE: 3, Y_START: 0, Y_SHIFT: 0

33	32	31	30	33	32	31	30	33	32	31	30	33	32	31	30
23	22	21	20	23	22	21	20	23	22	21	20	23	22	21	20
13	12	11	10	13	12	11	10	13	12	11	10	13	12	11	10
03	02	01	00	03	02	01	00	03	02	01	00	03	02	01	00
32	31	30	33	32	31	30	33	32	31	30	33	32	31	30	33
22	21	20	23	22	21	20	23	22	21	20	23	22	21	20	23
12	11	10	13	12	11	10	13	12	11	10	13	12	11	10	13
02	01	00	03	02	01	00	03	02	01	00	03	02	01	00	03
31	30	33	32	31	30	33	32	31	30	33	32	31	30	33	32

000000	000000	000000
000000	000000	000000
000000	000000	000000

G-3-O

```

EXCHANGE: 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 54, 55, 56, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 67, 68, 69, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100, 101, 102, 103, 104, 105, 106, 107, 108, 109, 110, 111, 112, 113, 114, 115, 116, 117, 118, 119, 120, 121, 122, 123, 124, 125, 126, 127, 128, 129, 130, 131, 132, 133, 134, 135, 136, 137, 138, 139, 140, 141, 142, 143, 144, 145, 146, 147, 148, 149, 150, 151, 152, 153, 154, 155, 156, 157, 158, 159, 160, 161, 162, 163, 164, 165, 166, 167, 168, 169, 170, 171, 172, 173, 174, 175, 176, 177, 178, 179, 180, 181, 182, 183, 184, 185, 186, 187, 188, 189, 190, 191, 192, 193, 194, 195, 196, 197, 198, 199, 200, 201, 202, 203, 204, 205, 206, 207, 208, 209, 210, 211, 212, 213, 214, 215, 216, 217, 218, 219, 220, 221, 222, 223, 224, 225, 226, 227, 228, 229, 230, 231, 232, 233, 234, 235, 236, 237, 238, 239, 240, 241, 242, 243, 244, 245, 246, 247, 248, 249, 250, 251, 252, 253, 254, 255, 256, 257, 258, 259, 260, 261, 262, 263, 264, 265, 266, 267, 268, 269, 270, 271, 272, 273, 274, 275, 276, 277, 278, 279, 280, 281, 282, 283, 284, 285, 286, 287, 288, 289, 290, 291, 292, 293, 294, 295, 296, 297, 298, 299, 300, 301, 302, 303, 304, 305, 306, 307, 308, 309, 310, 311, 312, 313, 314, 315, 316, 317, 318, 319, 320, 321, 322, 323, 324, 325, 326, 327, 328, 329, 330, 331, 332, 333, 334, 335, 336, 337, 338, 339, 340, 341, 342, 343, 344, 345, 346, 347, 348, 349, 350, 351, 352, 353, 354, 355, 356, 357, 358, 359, 360, 361, 362, 363, 364, 365, 366, 367, 368, 369, 370, 371, 372, 373, 374, 375, 376, 377, 378, 379, 380, 381, 382, 383, 384, 385, 386, 387, 388, 389, 390, 391, 392, 393, 394, 395, 396, 397, 398, 399, 400, 401, 402, 403, 404, 405, 406, 407, 408, 409, 410, 411, 412, 413, 414, 415, 416, 417, 418, 419, 420, 421, 422, 423, 424, 425, 426, 427, 428, 429, 430, 431, 432, 433, 434, 435, 436, 437, 438, 439, 440, 441, 442, 443, 444, 445, 446, 447, 448, 449, 450, 451, 452, 453, 454, 455, 456, 457, 458, 459, 460, 461, 462, 463, 464, 465, 466, 467, 468, 469, 470, 471, 472, 473, 474, 475, 476, 477, 478, 479, 480, 481, 482, 483, 484, 485, 486, 487, 488, 489, 490, 491, 492, 493, 494, 495, 496, 497, 498, 499, 500, 501, 502, 503, 504, 505, 506, 507, 508, 509, 510, 511, 512, 513, 514, 515, 516, 517, 518, 519, 520, 521, 522, 523, 524, 525, 526, 527, 528, 529, 530, 531, 532, 533, 534, 535, 536, 537, 538, 539, 540, 541, 542, 543, 544, 545, 546, 547, 548, 549, 550, 551, 552, 553, 554, 555, 556, 557, 558, 559, 560, 561, 562, 563, 564, 565, 566, 567, 568, 569, 570, 571, 572, 573, 574, 575, 576, 577, 578, 579, 580, 581, 582, 583, 584, 585, 586, 587, 588, 589, 590, 591, 592, 593, 594, 595, 596, 597, 598, 599, 600, 601, 602, 603, 604, 605, 606, 607, 608, 609, 610, 611, 612, 613, 614, 615, 616, 617, 618, 619, 620, 621, 622, 623, 624, 625, 626, 627, 628, 629, 630, 631, 632, 633, 634, 635, 636, 637, 638, 639, 640, 641, 642, 643, 644, 645, 646, 647, 648, 649, 650, 651, 652, 653, 654, 655, 656, 657, 658, 659, 660, 661, 662, 663, 664, 665, 666, 667, 668, 669, 670, 671, 672, 673, 674, 675, 676, 677, 678, 679, 680, 681, 682, 683, 684, 685, 686, 687, 688, 689, 690, 691, 692, 693, 694, 695, 696, 697, 698, 699, 700, 701, 702, 703, 704, 705, 706, 707, 708, 709, 710, 711, 712, 713, 714, 715, 716, 717, 718, 719, 720, 721, 722, 723, 724, 725, 726, 727, 728, 729, 730, 731, 732, 733, 734, 735, 736, 737, 738, 739, 740, 741, 742, 743, 744, 745, 746, 747, 748, 749, 750, 751, 752, 753, 754, 755, 756, 757, 758, 759, 760, 761, 762, 763, 764, 765, 766, 767, 768, 769, 770, 771, 772, 773, 774, 775, 776, 777, 778, 779, 780, 781, 782, 783, 784, 785, 786, 787, 788, 789, 790, 791, 792, 793, 794, 795, 796, 797, 798, 799, 800, 801, 802, 803, 804, 805, 806, 807, 808, 809, 810, 811, 812, 813, 814, 815, 816, 817, 818, 819, 820, 821, 822, 823, 824, 825, 826, 827, 828, 829, 830, 831, 832, 833, 834, 835, 836, 837, 838, 839, 84
```

30	20	10	00	33	23	13	03	32	22	12	02	31	21	11	01
31	21	11	01	30	20	10	00	33	23	13	03	32	22	12	02
32	22	12	02	31	21	11	01	30	20	10	00	33	23	13	03
33	23	13	03	32	22	12	02	31	21	11	01	30	20	10	00
30	20	10	00	33	23	13	03	32	22	12	02	31	21	11	01
31	21	11	01	30	20	10	00	33	23	13	03	32	22	12	02
32	22	12	02	31	21	11	01	30	20	10	00	33	23	13	03
33	23	13	03	32	22	12	02	31	21	11	01	30	20	10	00
30	20	10	00	33	23	13	03	32	22	12	02	31	21	11	01

[illegible]

FIG. 31

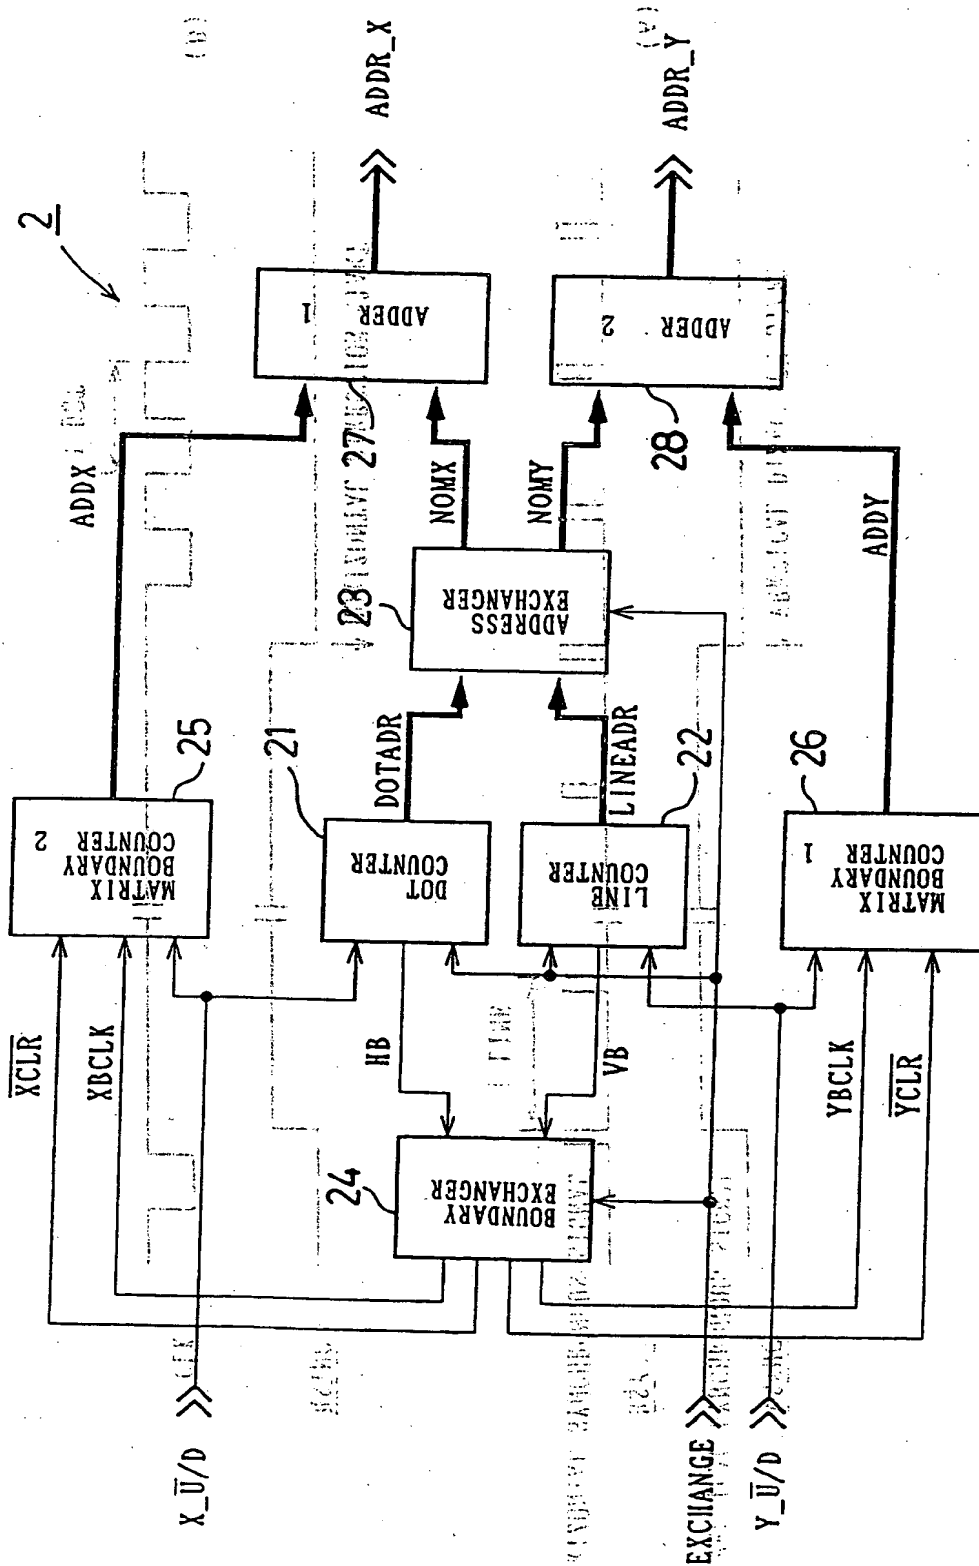


FIG. 32

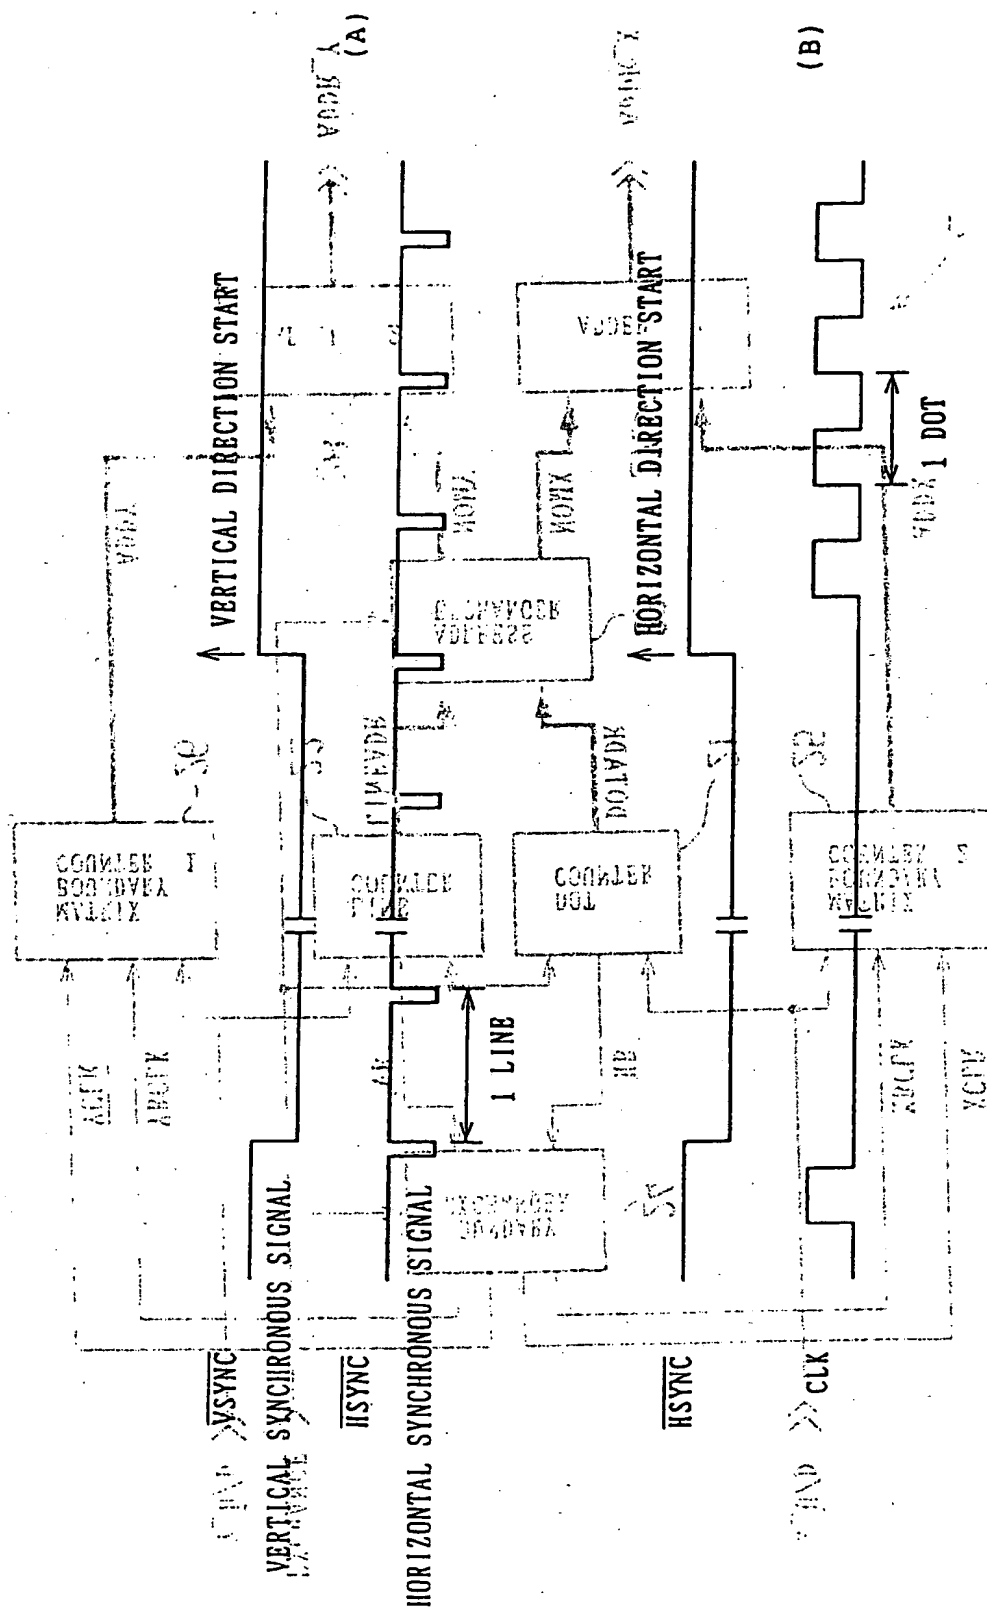
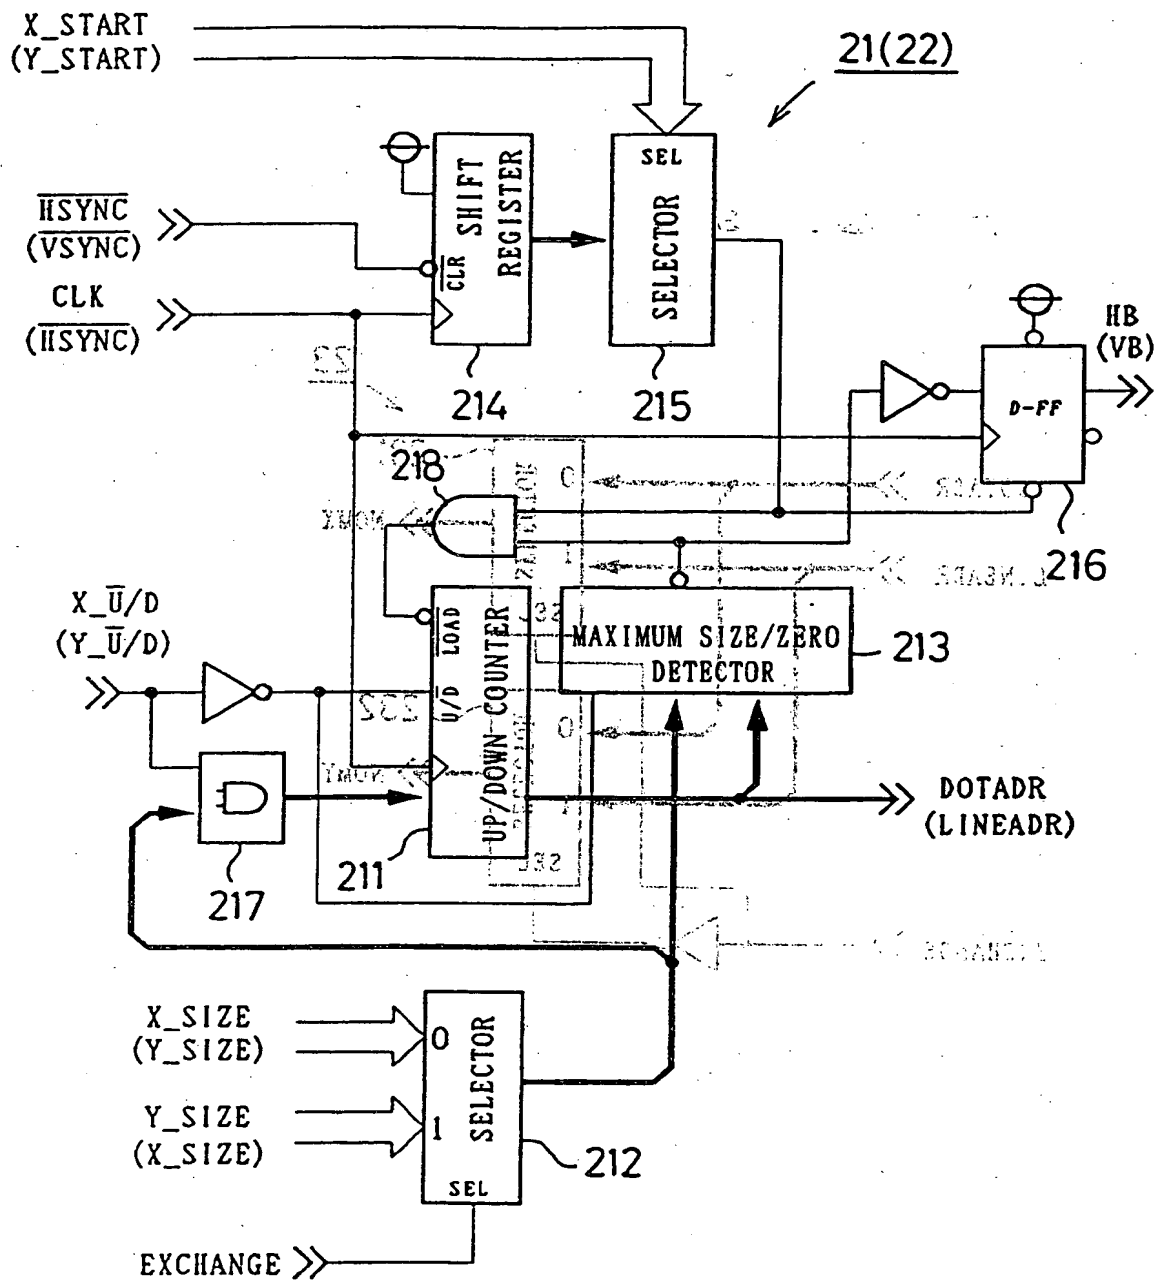


FIG. 33



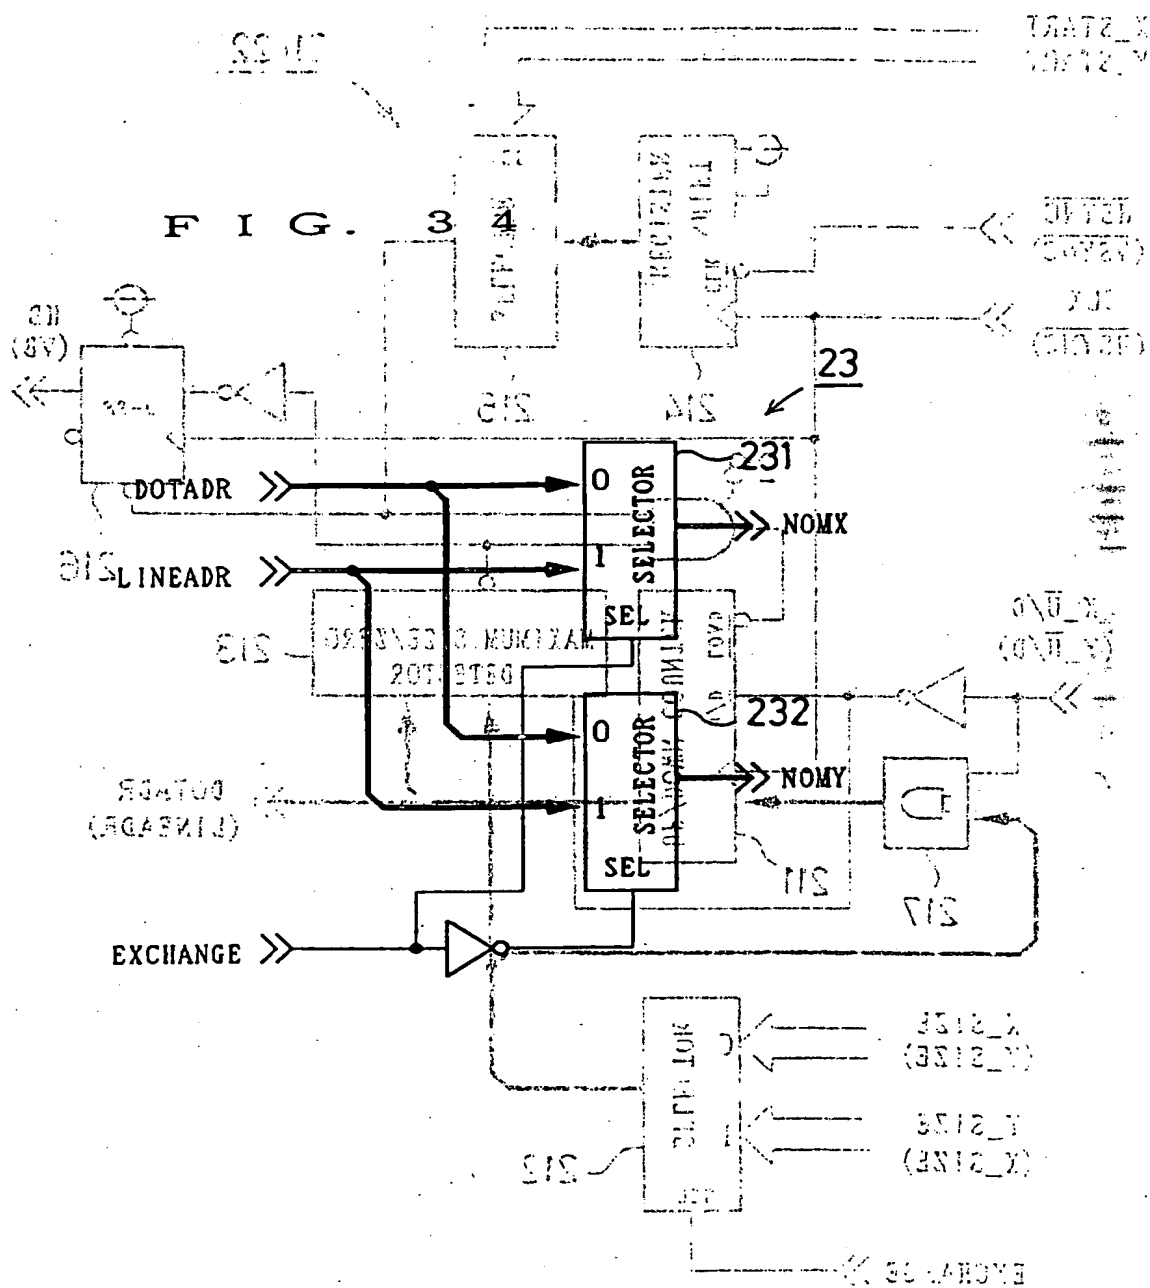
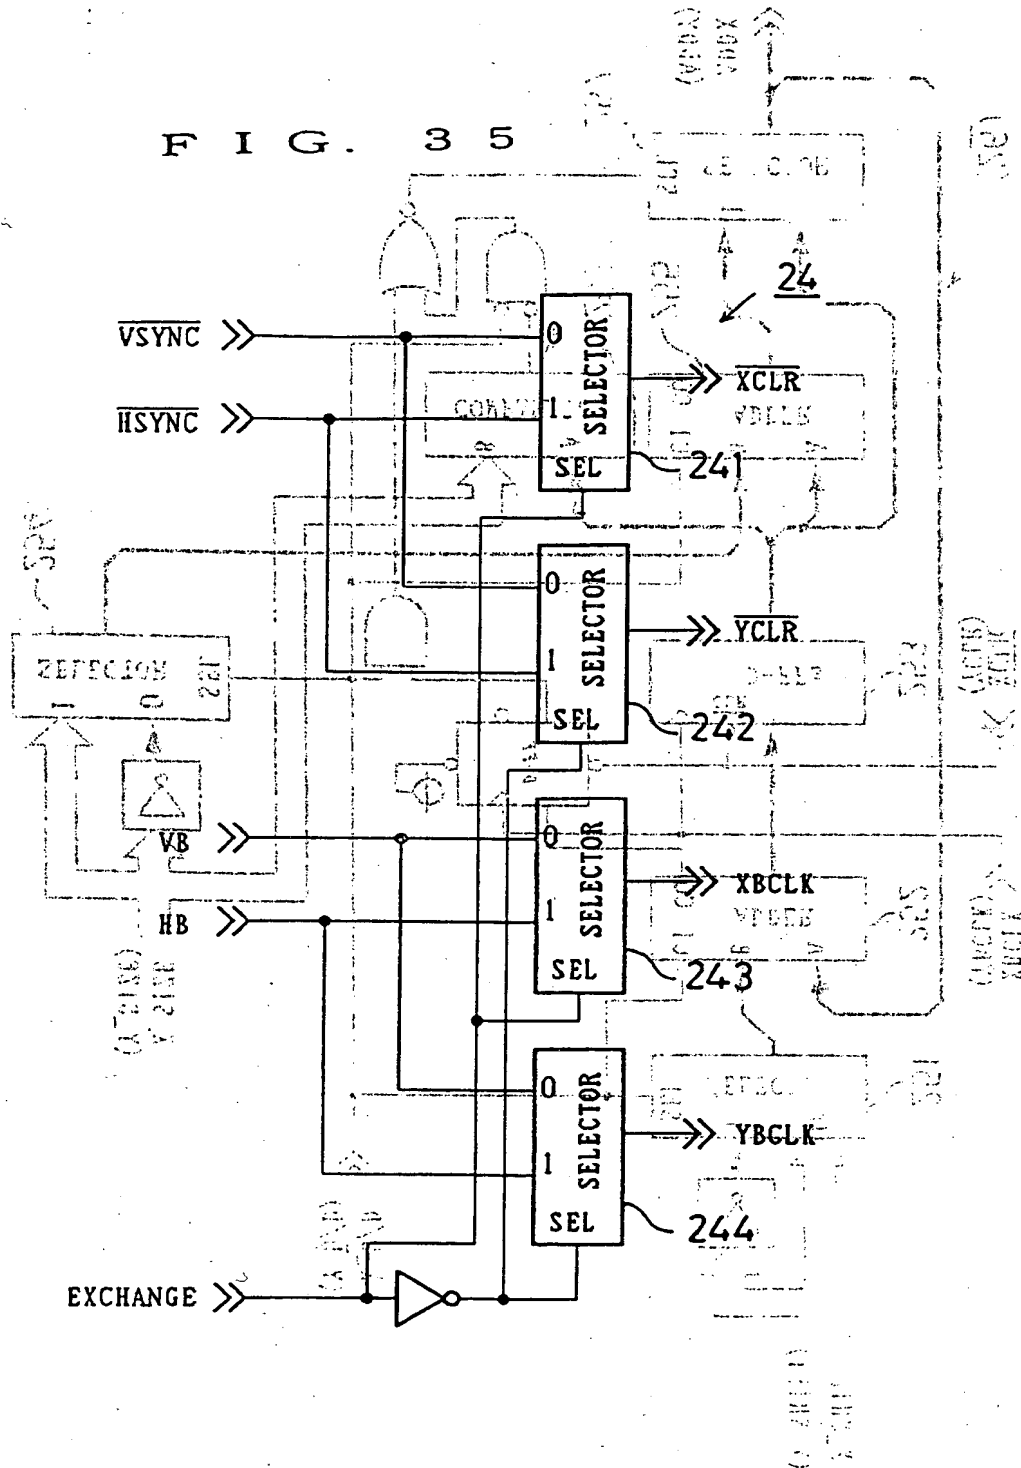


FIG. 35






FIG. 37


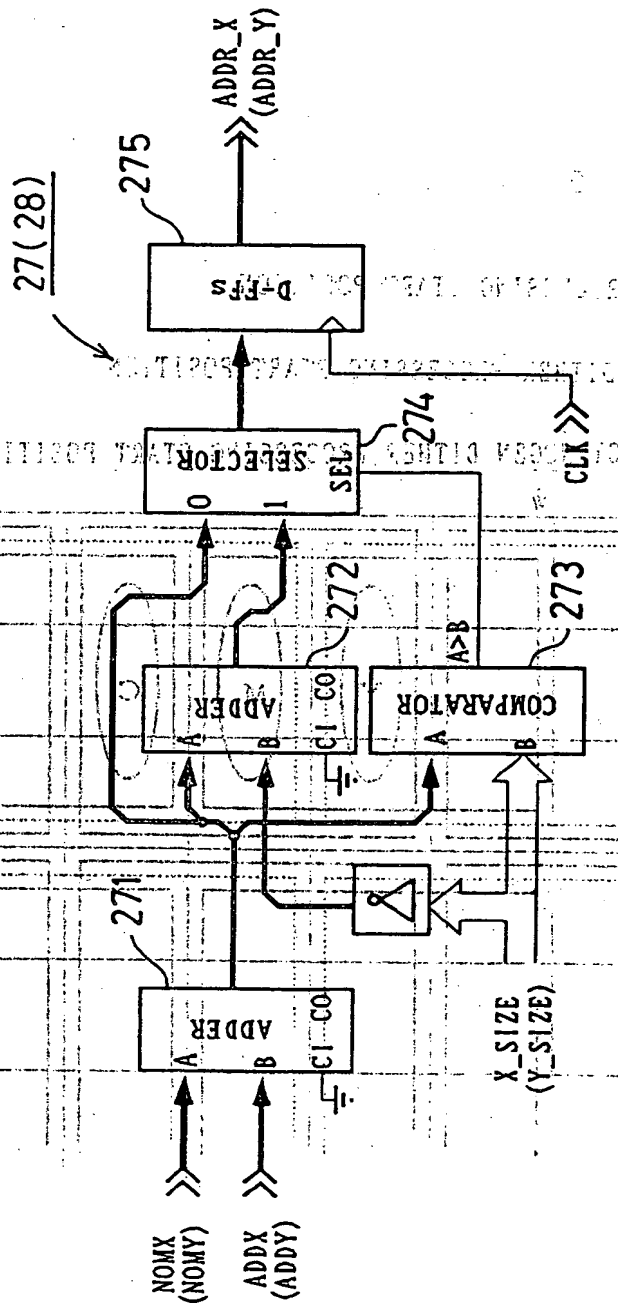


FIG. 38

YELLOW DITHER PROCESSING START POSITION

MAGENTA DITHER PROCESSING START POSITION

CYANOGEN DITHER PROCESSING START POSITION

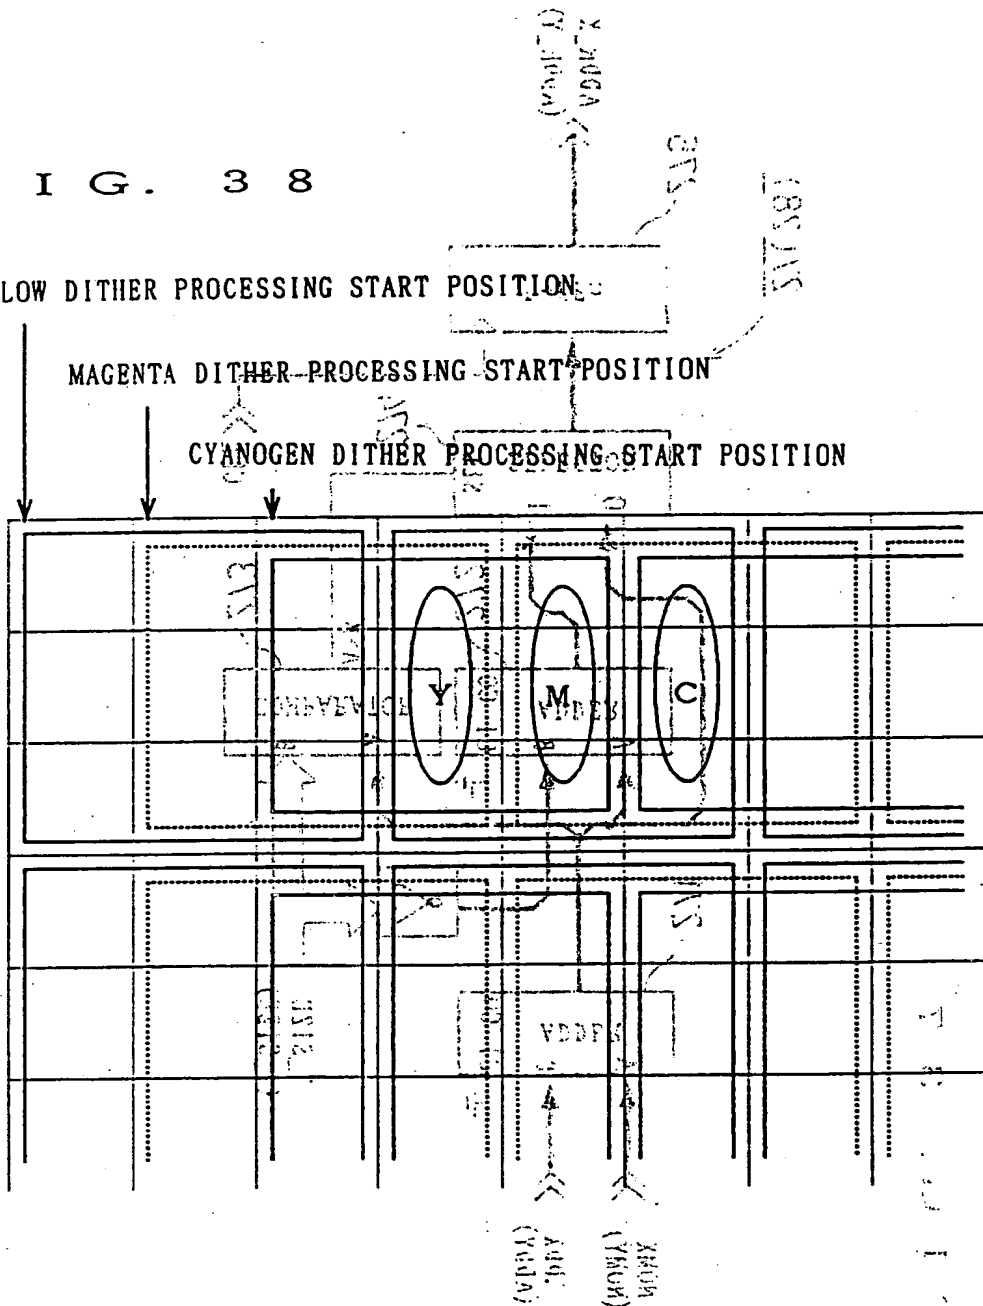

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number:

0 503 645 A3

(12)

EUROPEAN PATENT APPLICATION(21) Application number: **92104312.1**(51) Int. Cl.⁵: **H04N 1/40**(22) Date of filing: **12.03.92**(30) Priority: **12.03.91 JP 73843/91**

**2-28, Tamatsukuri 1-chome Chuo-ku
Osaka-shi Osaka-fu 540(JP)**

(43) Date of publication of application:
16.09.92 Bulletin 92/38

(72) Inventor: **Shimatani, Akira**
481, Wada
Sakai-shi, Osaka-fu, 593(JP)

(84) Designated Contracting States:
DE FR GB IT NL

(88) Date of deferred publication of the search report:
03.03.93 Bulletin 93/09


(74) Representative: **Bohnenberger, Johannes, Dr.**
et al
Meissner, Bolte & Partner
Widenmayerstrasse 48 Postfach 86 06 24
W-8000 München 86 (DE)

(71) Applicant: **MITA INDUSTRIAL CO. LTD.**(54) **Matrix address generator and multivalue gradation processor having the same.**

(57) The present invention provides a matrix address generator for generating horizontal and vertical addresses in various patterns in the case where a memory table matrix provided in gradation data storage means is specified by the horizontal and vertical addresses. The matrix address generator (2) comprises a dot counting portion (21), a line counting portion (22), an address exchanging portion (23), a

boundary exchanging portion (24), matrix boundary counting portions (25) and (26), and adding portions (27) and (28). Addresses counted by the dot counting portion (21) are exchanged by the address exchanging portion (23) if necessary. The addresses and adding addresses counted by the matrix boundary counting portion (25) are added together so that addresses having various patterns can be obtained.

FIG. 31

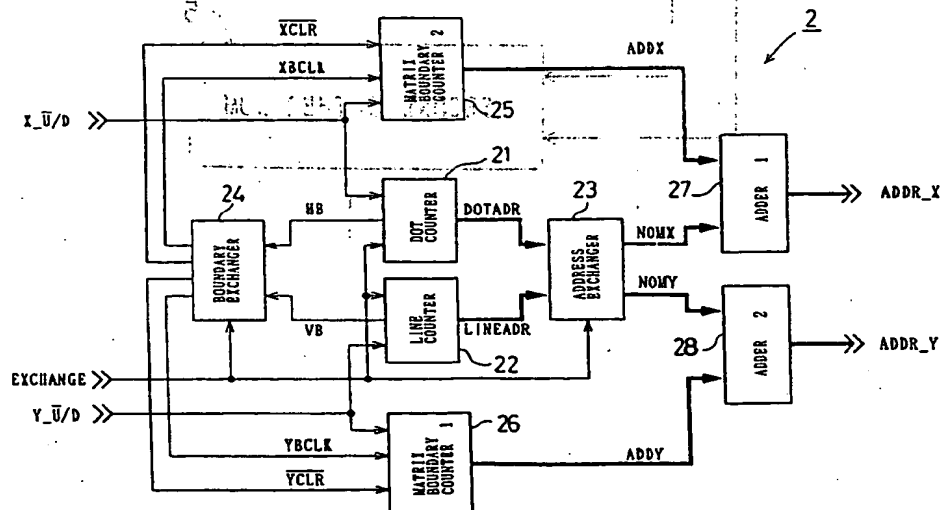



EUROPEAN PATENT OFFICE

INTERNATIONAL BUREAU OF PATENT COOPERATION
FEDERAL BUREAU OF PATENT & TRADEMARKS
DEPARTMENT OF COMMERCE
UNITED STATES PATENT & TRADEMARK OFFICE

TCM



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number

EP 92-10-4312

DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.5)
X Y A	US-A-4 507 685 (N. KAWAMURA) * column 8, line 8 - column 9, line 4 * * column 10, line 17 - column 11, line 12 *	10 24 1, 3, 5, 8, 9, 15, 18, 21	H04N1/40
Y	EP-A-0 141 869 (DR. ING. RUDOLF HELL GMBH) * page 13, line 4 - line 27 *	24	
A	US-A-4 533 941 (J.F. KEANE) * column 7, line 6 - line 58 * * column 21, line 43 - column 22, line 60 *	1, 3, 5, 8, 9, 15, 18, 21	
A	US-A-4 918 622 (E. M. GRANGER ET AL.)	-	
A	GB-A-2 155 728 (DAINIPPON SCREEN MFG CO.) * page 2, line 46 - page 3, line 14 *	11, 15, 18, 21	TECHNICAL FIELDS SEARCHED (Int. Cl.5) H04N
A	FR-A-2 397 412 (XEROX CORPORATION)		

The present search report has been drawn up for all claims

Place of search
THE HAGUE

Date of completion of the search
16 DECEMBER 1992

Searcher
DE ROECK A.F.A.

CATEGORY OF CITED DOCUMENTS

- X: particularly relevant if taken alone
Y: particularly relevant if combined with another document of the same category
A: technological background
O: non-written disclosure
P: intermediate document

- T: theory or principle underlying the invention
E: earlier patent document, but published on, or after the filing date
D: document cited in the application
L: document cited for other reasons

- A: member of the same patent family, corresponding document

EPO FORM 1503 (10/91)